

FORM PTO-1999  
(REV 12-29-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

Filed February 27, 2001

503.39687X00

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

097763806

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/03312

24 May 2000 (24.05.00)

**TITLE OF INVENTION COLOR/BLACK-AND-WHITE SWITCHABLE PORTABLE TERMINAL AND  
DISPLAY UNIT**

**APPLICANT(S) FOR DO/EO/US HIROTA, Shouichi; TSUMURA Makoto; HIYAMA Ikuo; OOUCHI Takayuki**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11. to 16. below concern document(s) or information included:**


11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☒ A change of power of attorney and/or address letter.
17. ☒ Other items or information:

List and Copies of Prior Art w/refs

PCT Application as filed

Copy of Demand under Art. 31 PCT ( Preliminary Examination)

Credit card payment form



- 17.
- ☒
- The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :**

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO ..... \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$96.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS** PTO USE ONLY

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	46 - 20 =	26	X \$18.00	\$ 468.00
Independent claims	12 - 3 =	9	X \$78.00	\$ 720.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$260.00
<b>TOTAL OF ABOVE CALCULATIONS</b>				<b>= \$ 2,318.00</b>

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement  
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

**SUBTOTAL** = \$ 2,318.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

**TOTAL NATIONAL FEE** = \$ 2,318.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

**TOTAL FEES ENCLOSED** = \$ 2,358.00

Amount to be refunded:	\$
charged:	\$

Credit card payment

- a. ☒ A ~~check~~ in the amount of \$ 2,358.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 91-2135. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

Melvin Kraus  
Antonelli, Terry, Stout & Kraus, LLP  
1300 N. 17th Street  
Suite 1800  
Arlington, VA 22209

SIGNATURE:

Melvin Kraus

NAME

22,466

REGISTRATION NUMBER

17/PATS

09/763806  
JC03 Rec'd PCT/PTO 27 FEB 2001

1

SPECIFICATION

TITLE OF THE INVENTION

COLOR/BLACK-AND-WHITE SWITCHABLE PORTABLE TERMINAL

5

AND DISPLAY UNIT

TECHNICAL FIELD

The invention relates to a display unit and a device using  
this display unit such as a portable phone, a portable  
10 information terminal, a home electric product, etc.

BACKGROUND ART

With respect to a coloring technique in the display unit  
of a portable information device, Japanese Patent Laid-Open  
15 No. 213799/1998 discloses a technique relating to a reflection  
type color display of a color filter system having auxiliary  
illumination. Japanese Patent Laid-Open No. 106328/1998  
discloses a technique relating to a liquid crystal display unit  
for both reflection and transmission using a reflecting layer  
20 having a light polarizing state maintaining property.  
Japanese Patent Laid-Open No. 19257/1993 discloses a technique  
relating to a field sequential color system as a color display  
system in which no color filter is required. Japanese Patent  
Laid-Open No. 10529/2000 discloses a technique relating to a  
25 liquid crystal color display driving method in which red, green

09/763806-022701

and blue liquid crystal element operating signals are synthesized and set to a monochromatic video signal on the basis of consumed power restraining command signal, and power consumption is reduced by displaying only this monochromatic image.

As mentioned above, high image quality, coloring and low power consumption are required in a recent portable information device, but many problems described below exist in the technique relating to the conventional color portable information device.

#### DISCLOSURE OF THE INVENTION

First, in the reflection type color display of a system using the color filter, a problem exists in that an image is dark and is not easily seen in comparison with the reflection type black-and-white display by the absorption of light of the color filter at each time of using external light and using auxiliary illumination. It is necessary to construct one pixel by three subpixels of red, green and blue (hereinafter respectively called R, G and B) to perform the color display. Therefore, a problem also exists in that power in the image display is required three times at any time in comparison with the black-and-white display. Further, since the same driving system is adopted at each of a device using time and a standby time (a transmission display time and a reflection display

time), the difference in consumed power is only a difference in consumed power of a light source itself due to turning-on and turning-off of the light source. Therefore, room for improvement is also left in a reduction in power consumption.

- 5 Further, when a half mirror, a semi-transmitting reflection plate or a partial transmitting reflection plate having a partial opening portion, etc. are used as an external light reflecting means, a trade-off relation is formed in luminance at the transmission display time and luminance at the reflection display time. Therefore, image quality of incomplete brightness is formed in any display quality.

- 10 Accordingly, when the color display system using the color filter is adopted, a problem exists in that power consumption is large and a dark display image is formed in comparison with the black-and-white liquid crystal display unit at each of the reflection display time and the transmission display time (auxiliary light source using time).

- 15 In contrast to this, if the field sequential color display system using no color filter is adopted, the problem of the above-mentioned color filter can be solved, and high image quality can be obtained. However, in this case, the light source must be lighted at any time to display the image, and it is considered that room for improvement is yet left in the reduction in power consumption in a device characterized in that this device has plural using modes at the so-called device

09763806.022701

using time and the standby time (transmission display time and reflection display time).

Therefore, an object of the invention is to provide a display unit for reducing power consumption and able to perform  
5 the color display, or a portable information device having this display unit such as a portable phone, etc.

In accordance with one embodiment mode of the invention, a display unit having a light source has a mode switching section for switching a displayed image mode, a light source  
10 control section for controlling an operation of the light source in accordance with instructions from the mode switching section, an image signal processing section for processing an image signal in accordance with instructions from the mode switching section, and a liquid crystal cell for displaying  
15 the image in accordance with the image signal from the image signal processing section. Accordingly, it is possible to realize a bright display unit with reduced power consumption and high contrast in each of light emitting display and reflection display.

20 In one concrete embodiment mode, the image signal processing section of a driving section has a digital-analog converter and a level shifter. When the mode switching section switches the display mode to a multi-gradation display mode, the image signal generating section generates the image signal  
25 of analog multi-gradation by using the digital-analog

converter. When the mode switching section switches the display mode to a two-gradation display mode, the image signal generating section generates the image signal of analog binary gradation by using the level shifter. Accordingly, the driving method can be switched by using such a construction so that optimum power can be selected at any time, and consumed power can be optimized, and power consumption can be reduced.

Further, in another concrete embodiment mode, the display element has a liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in at least one of the pair of transparent substrates; a light polarizing maintaining diffusion reflection plate arranged on one face side of the liquid crystal cell; a light guide body arranged between the liquid crystal cell and the light polarizing maintaining diffusion reflection plate such that the light source is arranged on a side face of the light guide body; and a light polarizing maintaining scattering layer arranged between the light guide body and the liquid crystal cell. Accordingly, it is possible to realize a display unit in which light utilization efficiency is further increased, and the problem of a double image is also solved in addition to the effects in which power consumption is reduced and the display of high contrast can be performed in each of the light emitting display and the reflection display.

Further, in an example in a separate viewpoint of the invention, the display element has a liquid crystal cell having a pair of substrates; a liquid crystal layer nipped by the pair of substrates; plural pixels formed by an electrode kind  
5 arranged in at least one of the pair of substrates; and a light source arranged in accordance with each of the plural pixels and constructed by including a metallic electrode, an organic LED layer and a transparent electrode from a substrate side. Accordingly, an image is displayed by adjusting luminance of  
10 the organic LED at a color light emitting display time, and adjusting luminance of the liquid crystal at a reflection display time. Thus, bright image display with reduced power consumption and high contrast can be realized, and the display element can be entirely reduced in thickness.

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic view showing one embodiment mode of a display unit of the invention.

Fig. 2 is a view showing a difference in driving method  
20 between field sequential color display and black-and-white display.

Fig. 3 is a block diagram of a D/A converter switching means.

Fig. 4 is a block diagram of a gradation bit switching  
25 means.



Fig. 5 is a view showing an example in which 1-bit image data are generated from n-bit image data.

Fig. 6 is a view for explaining entire signal processing in a portable information terminal.

5 Fig. 7 is a view showing the relation of a scanning period, a liquid crystal response period and a light source lighting period.

Fig. 8 is a view showing a change in the light emitting intensity of a light source with the passage of time.

10 Fig. 9 is a cross-sectional view of a display unit in an embodiment 1 of the invention.

Fig. 10 is a cross-sectional view of a display unit in an embodiment 2 of the invention.

15 Fig. 11 is a cross-sectional view of a display unit in an embodiment 3 of the invention.

Fig. 12 is a view of the construction of a pixel circuit of the display unit in Fig. 11.

Fig. 13 is a cross-sectional view of a display element in an embodiment 4 of the invention.

20 Fig. 14 is a view of the construction of a pixel circuit of the display element in Fig. 13.

Fig. 15 is a layout view of the pixel circuit of the display element in the invention.

25 Fig. 16 is a cross-sectional view of a display unit in an embodiment 5 of the invention.

09763806.022701

Fig. 17 is a typical view of the schematic appearance of a portable phone in an embodiment 6 of the invention.

Fig. 18 is a block diagram of a main construction of the portable phone.

5 Fig. 19 is a view showing a processing flow of a markup language.

Fig. 20 shows an example of a description using the markup language.

10 Fig. 21 shows an example of a display mode selection screen in the portable phone.

Fig. 22 shows an example of electronic commercial transactions.

15 Fig. 23 is a block diagram of a processing operation of commands or tag information for commanding color light emitting display.

Fig. 24 is a typical view of an external appearance of the portable information terminal.

#### BEST MODE FOR CARRYING OUT THE INVENTION

20 One embodiment mode of a display unit of the present invention will be explained by using Fig. 1. The display unit of Fig. 1 is mainly constructed by including a display element 101 and a driving section 105 for operating the display element 101.

25 The driving section 105 will first be explained.

00763806-022701  
10/23/90 9:08:26 AM

The driving section 105 has a signal processing switching section 106, a light source control section 111, and signal processing sections 112, 113.

The signal processing switching section 106 performs  
5 switching control of a processing method of an image signal displayed in the display element 101 and on/off control of a color light emitting means 103 through a driving signal interface 107 at any time. The switching control of the image signal processing method for displaying the image signal in  
10 the display element 101 means e.g., switching control of color light emitting display and reflection display in view of a display state. In view of processing contents, for example, one of the signal processing sections 112, 113 is selected, switched and controlled in the switching control of the image  
15 signal processing method. Each of the signal processing sections 112, 113 processes the image signal inputted from the exterior, and converts the inputted image signal to an image signal suitable for the display state, or generates this suitable image signal. The arrangement of plural signal  
20 processing sections for making such a work means that the driving section 105 has plural paths for processing the image signal. In a concrete example of the switching control of the signal processing method, there are switching control of a driving frequency, switching control of each case of using and  
25 unusing a digital/analog converter, switching control of the

09763806 022701

number of operated pixels, switching control of a circuit block for supplying a clock, etc. The light source control section 111 is a circuit section for controlling an operation of the light source arranged in the display element 101, and an operation of the light source control section 111 is controlled by the signal processing switching section 106. Each of these sections will be explained in detail in a later embodiment.

The switching control of the signal processing method, i.e., selection switching of the signal processing section can be performed by adopting such a construction. This finally means that consumed power can be switched. Accordingly, it is possible to supply power by an amount required at each of the color light emitting display time and the reflection display time. Therefore, display with high definition and high quality can be performed at the color light emitting display time, and useless power can be reduced, and consumed power can be optimized, and power consumption can be greatly reduced at the reflection display time. As a matter of course, power can be also reduced by turning-on and turning-off the color light emitting means 103.

The driving section 105 in the display unit has the plural signal processing sections 112, 113 and the signal processing switching section 106. Power consumption of the display unit is reduced by switching the plural signal processing sections by this signal processing switching section 106 at any time.

09763806-022701  
10/22/20 9:08:29 AM

This simultaneously means that one display element has plural display states. Accordingly, it is necessary to set the display element itself to be adapted to the plural display states. Therefore, the display element 101 is also devised  
5 and combined with the above driving circuit section 105 so that power consumption is further reduced and image quality is further improved. In the following embodiments, an explanation is made by using the signal processing switching section and the plural signal processing sections, but one  
10 signal processing section and plural signal processing paths may be also arranged, or the signal processing switching section can be also arranged within the signal processing section when these actions are obtained. Various kinds of modifications are included in a range where the plural signal  
15 processing paths can be arranged and its selection control can be performed.

The display element 101 will next be explained.

The display element 101 is constructed by including a light polarizing state modulating means 102, a color light  
20 emitting means 103 for emitting color light, and an external light reflecting means 104 for reflecting external light 109. The color light emitting display means both a case in which an illuminating means except for the external light is arranged, and light emitted from this illuminating means is modulated  
25 by the light polarizing state modulating means and is displayed

as an image, and a case in which a light emitting element is included and formed in each pixel of the display element, and an image is displayed by adjusting light emission and luminance of each light emitting element. In the former case, for example, there is a liquid crystal display element in which a backlight is set to the illuminating means and a liquid crystal element is used as a luminance adjusting means. In this case, the liquid crystal display element is the light polarizing state modulating means 102, and the backlight is the color light emitting means 103. In the latter case, there is a display element using an organic LED (Light Emitting Diode) display element and an organic EL (also called Electroluminescence) display element. In this case, the liquid crystal display element also corresponds to the light polarizing state modulating means 102, but the organic LED display element corresponds to the color light emitting means 103. These examples and effects peculiar to this construction will be explained in later embodiments.

One of common features of the display element 101 is that the color light emitting means 103 is arranged between the light polarizing state modulating means 102 and the external light reflecting means 104. Thus, the display element 101 of the invention can use a mirror of total reflection as the external light reflecting means 104 instead of a half mirror used in the conventional display element. Accordingly, there is no

loss of a light amount due to the half mirror at each of the reflection display time and the color light emitting display time. Namely, no trade-off relation is formed in luminance between both the displays. In a detailed explanation, almost  
5 all of each of the external light 109 and the emitted light 108 is emitted to the exterior (upward in Fig. 1) of the display element 101 by the external light reflecting means 104, etc., and light can be efficiently utilized so that display of high contrast can be performed and display quality can be improved.  
10 Further, the light emitting means arranged on an upper face of the external light reflecting means has a function of the color light emitting display so that bright color light emitting display can be performed without using a color filter. Furthermore, at the reflection display time, black-and-white  
15 display can be performed without using the color light emitting means 103 so that it is possible to adapt the display to each of the light emitting display, the reflection display and a different display method. This is particularly suitable for a device having the above driving circuit section which can  
20 reduce excessive power at the reflection display time, and is effective to reduce power consumption.

From the above description, power consumption of the driving section 105 is greatly reduced by switching of signal processing (switching of the display states), and the display  
25 element 101 is suitable for both the display states of the color

light emitting display and the reflection display, and can perform display with high contrast and light, high image quality. Further, it is possible to provide a display unit with high image quality and reduced power consumption by combining these constructions.

Detailed constructions of the display element 101 and the driving section 105 and effects peculiar to these constructions, etc. will be described in detail in the following embodiments.

The same reference numerals used in each figure designate the same or corresponding objects.

(Embodiment 1)

One embodiment of the display unit in the invention will be sequentially explained by using Figs. 1 to 5.

In the display unit of this embodiment, light emitting display is performed by field sequential driving of multi-gradation color, and reflection display is performed by frame driving of black-and-white binary display. The field sequential driving of the multi-gradation color is performed at a light emitting display time since the light emitting display time is a time of using the display unit in many cases, and it is considered to improve convenience of a user requiring the display of a larger amount of information with high image quality. The frame driving of the black-and-white binary display is performed at a reflection display time since the



reflection display time is a standby time of the display unit in many cases, and it is considered to reduce power consumption while a function property of the display unit is secured. Namely, this display unit can optimize consumed power and

5 reduce power consumption by switching driving methods in consideration of a function (display ability, etc.) required for the user at each of the color light emitting display time and the reflection display time. In this specification, the frame driving is a driving method for changing the driving

10 voltage of a liquid crystal every one frame period, and this term is used to discriminate this frame driving from field sequential driving having plural subframe periods within one frame period.

Points of the reduction in power consumption in the

15 driving circuit section 105 (see Fig. 1) will next be explained.

As mentioned above, the driving section 105 has the signal processing switching section 106, the light source control section 111, and the signal processing sections 112, 113. In the invention, the display element 101 is set to have

20 a display section including a display control section (a so-called scanning side driving circuit section, a signal side driving circuit section, etc.) for controlling the operation of an active matrix on an active matrix substrate. Each of constructional elements of the driving section 105 may be

25 arranged on the active matrix substrate of the display element

101, and may be also arranged outside the display element 101. The driving section 105 is rigidly considered as a functional set of the above constructional elements, and no position of a concrete arrangement of this driving section 105 is strictly limited.

The signal processing switching section 106 reduces power consumption by selectively using signal processing corresponding to each of the color light emitting display and the reflection display at any time. Here, we have noticed the difference between both the displays, i.e., the driving method and gradation to reduce power consumption, and the power consumption is reduced with respect to each point. This construction will next be explained.

First, a first point is to switch the driving methods, i.e., operating frequencies. The field sequential color display method is adopted in the light emitting display. Therefore, each subfield (at least three subframe periods in total) of at least the three primary colors RGB is required to perform the color light emitting display in one frame period.

In contrast to this, frame driving of the black-and-white display is adopted at the reflection display time so that it is not necessary to arrange the subfield required at the color display time. Accordingly, operating frequency at the reflection display time is reduced in comparison with operating frequency at the color light emitting display time, and can

be set to at least one-third and less. As a result, a power consumption amount can be greatly reduced. In this case, it is sufficient to add a circuit construction (driving frequency control section) for switching frequencies of the driving section.

A second point is to reduce power consumption by a method (memory switching method) for switching gradation. As mentioned above, this is because convenience is improved by adopting multi-gradation display at the color display time, and power consumption is reduced by adopting binary display at the black-and-white display time. The power consumption can be reduced by setting the binary display of black-and-white from the color multi-gradation since the use of a digital-analog converter of relatively large power consumption required to perform the multi-gradation display is avoided. In this case, it is also useful to reduce the power consumption by detouring a signal path (digital-analog converter) of large power consumption, and simultaneously stopping the supply of a clock to the digital-analog converter.

In this case, it is also useful to use a construction for changing memories at the color light emitting display time and the reflection display time. In this embodiment, this construction is realized by providing a function for realizing a memory switching method in the signal processing switching portion 106. In this specification, this gradation switching

method includes switching of an image signal and conversion of bits of the image signal. This method will be also described later.

In a separate view of the second point, at a normal time, i.e., when the light emitting display is selected, the display of a high bit number ( $n$ -bits) is performed. In contrast to this, when the reflection display is selected by commands of a user, etc., an image signal for the reflection display suitable for low power consumption is separately regenerated, and the display of a low bit number ( $m$ -bits  $n > m$ ) is performed so that the power consumption is reduced.

A technique for reducing the power consumption will next be explained together with a concrete example.

Fig. 2 is an explanatory view about the reduction in power consumption using switching of operating frequencies at the above first point.

In each of upper and lower waveforms of Fig. 2, the axis of abscissa shows time, and the axis of ordinate shows a voltage value applied to a pixel electrode. The upper waveform shows a voltage waveform applied at the field sequential color driving time, and the lower waveform shows a voltage waveform applied at the black-and-white frame driving time.

In the application voltage waveform 141 of the field sequential color driving, one frame period 143 is constructed by three subframe periods 140. In each of these subframe

periods 140, the application voltage corresponding to each of the three primary colors RGB is applied to the pixel electrode. Since the three primary colors RGB corresponding to the application voltage are switched in an order of RGB every subframe period, an observer recognizes this switching as color display. In this figure, one frame period is constructed by the three subframe periods. Therefore, for example, when frame frequency is set to 60 Hz, it is necessary to set subframe frequency, i.e., operating frequency to 180 Hz.

In contrast to this, in the application voltage waveform 144 of the frame driving, no subframe period exists within one frame period 143. Accordingly, similar to the above case, no subframe period exists even when frame frequency is set to 60 Hz. Therefore, the frame frequency of 60 Hz is set to operating frequency as it is.

This display unit notices a difference in operating frequency at the above field sequential color driving time and the frame driving time, and switches the operating frequency at the frame driving time to one-third of the operating frequency at the field sequential color display time. Thus, power consumption can be reduced by the difference in operating frequency. This construction can be realized by arranging an operating frequency control section for switching the frequency of a dot clock for controlling a time interval of data transfer to a pixel in accordance with a display mode

within e.g., the driving section, a control section of an entire device, etc. At the black-and-white frame display time, i.e., the reflection display time, the power consumption is also reduced by turning-off the light source.

5 In Fig. 2, voltage polarity of the application voltage of the field sequential color driving is inverted with respect to a central electric potential every one subframe period, but can be also inverted every one frame period. Further, the number of subframes constituting one frame is not limited to  
10 three. This is because the point is to reduce power consumption by the difference in frequency.

Fig. 3 is a view for explaining a method for reducing power consumption by setting the black-and-white display at the reflection display time to binary display at the above  
15 second point, i.e., a method for reducing power consumption by switching use and unuse of a circuit block of relatively large power consumption such as a digital-analog converter, etc. In Fig. 2, the color multi-gradation display is performed by n-bit display, and the black-and-white display is performed  
20 by two-gradation display of 1-bit display.

Fig. 3 is a view showing the driving section 105 within the display unit. The driving section 105 has a signal processing switching section 106 having a memory control section 240 and a signal control section 245, a first signal  
25 processing section 112, and a second signal processing section

113.

The first signal processing circuit section 112 has an n-bit memory 241 and a digital/analog converter 243. The second signal processing circuit section 113 has a 1-bit memory 242 and a level shifter 244. The n-bit memory 241 and the 1-bit memory 242 are arranged independently, and have a function for holding image signals for the color display and the black-and-white display.

The memory control section 240 are connected to at least the D/A converter 243, the level shifter 244, the signal control section 245, the 1-bit memory 241 and the n-bit memory 242, and performs a control operation such as the writing operation of an image signal, etc. by selecting one of the memories in accordance with a control signal. For example, the control signal includes instructions for controlling one of the color display and the black-and-white display, etc. In this embodiment, this image signal is a digital signal. An image signal of n-bits is transmitted in the color multi-gradation display, and an image signal of one bit is transmitted in the black-and-white display (for example, a control section of the entire device if it is a portable device, etc.). In this case, the switching operation may be performed by judging the number of bits of the image signal by the memory control circuit section. In this case, it can be also constructed such that the image signal is also a control signal.

In the above description, the driving section 105 selects a display path according to the transmitted image signal and the control signal.

An operation and effects of the signal processing switching section 106 in Fig. 3 will next be explained.

When the memory control section 240 selects the n-bit memory 241 by the control signal transmitted from the exterior, the image signal is stored to the n-bit memory 241, and is then converted to an analog signal by the D/A converter 243. An image is then displayed in the display element 101 through the signal control section 245 and the driving interface 107. In contrast to this, when the memory control section 240 selects the 1-bit memory 242, the image signal is stored to the 1-bit memory 242, and is then converted to a binary analog signal by the level shifter 244. An image is then displayed in the display element 101 through the signal control section 245 and the driving interface 107.

In this embodiment, a combination using both the image signals of the n-bit gradation and the 1-bit gradation is adopted as the image signal transmitted from the exterior. However, the image signal of only the n-bit gradation is also considered. In this case, a section (bit converting section) for converting n-bits to one bit is added to the memory control section 240 or the signal processing section 113. This bit converting circuit section may be also arranged before or after



the image signal is inputted to the memory control section. When the bit converting circuit section is arranged after the image signal is inputted to the memory control section, this bit converting circuit section may be arranged before the 1-bit  
5 memory. In contrast to this, when the bit converting circuit section is arranged before the image signal is inputted to the memory control section, the memory control section 240 has this function. A concrete example of the case of generating a signal from n-bits to one bit will be described later.

10 As mentioned above, it is possible to detour the D/A converter 243 of large power consumption by using a construction in which both the n-bit gradation display and the 1-bit gradation display (binary display) are provided and the D/A converter 243 and the level shifter 244 are selected.

15 Namely, power consumption can be greatly reduced at the one-bit gradation display (binary display) time. This is particularly effective in a situation in which low power consumption is important at a standby time in a portable phone using the display unit.

20 In this embodiment, the n-bit multi-gradation color display is performed at the time of using the D/A converter, and the one-bit black-and-white display is performed by two gradations of one bit at the time of using the level shifter as an example. However, the display unit may be also  
25 constructed such that the color display at the time of using

the D/A converter can be performed by the multi-gradation of n-bits, and the display at the time of using the level shifter can be set to the color display (eight-color display) of 1-bit gradation in which the 1-bit memory is arranged every each of the three primary colors. This construction is suitable for a case in which only character information is displayed in color in a portable phone using this display unit, etc. This construction is also effective to reduce power consumption.

Otherwise, the display unit may be also constructed such that the black-and-white display is performed by the n-bit gradation. This has an effect of a reduction in power consumption when a natural image is displayed in gray scale. This construction can be realized by arranging a circuit portion for converting a color image signal to a black-and-white image signal. Concretely, each of color multi-gradation display, color 1-bit gradation display, black-and-white (monochromatic) multi-gradation display and black-and-white (monochromatic) 1-bit display can be performed by the construction of the invention.

The arrangement construction of the entire circuit is not limited to Fig. 3, but a construction shown in Fig. 4 can be also used. This construction will next be explained. The difference in construction between Figs. 3 and 4 is that the n-bit memory 241 can be also used in the case of the 1-bit gradation display. In a concrete construction, the n-bit

memory 241 of one kind is adopted as a memory, and is arranged independently of the D/A converter 243 and the level shifter 244.

An operation and effects of the display unit in Fig. 4 will be explained. A memory control section 246 stores a supplied image signal to a necessary area of the n-bit memory 241 in accordance with a control signal. The image signal supplied to the memory control section 246 in this example is set to a combination of an n-bit gradation signal and a 1-bit gradation signal. When the n-bit gradation display is performed, the n-bit gradation signal is supplied to the D/A converter 243. In contrast to this, when the 1-bit gradation display is performed, the 1-bit gradation signal is supplied to the level shifter 244. The D/A converter 243 generates an image signal of analog gradation, and the level shifter 244 generates an image signal of binary gradation. One of the image signals generated through the signal control section 245 is supplied to the display element 101. In view of consumed power, it is desirable to construct the display unit such that a clock is supplied to only one of the D/A converter 243 and the level shifter 245 in accordance with the n-bit gradation display or the 1-bit gradation display.

As mentioned above, it is also possible to use a construction in which the image signal inputted from the exterior of the driving section 105 is set to n-bits at any

09763806-022701

time, and a circuit section (bit converting section) for converting the image signal to one bit is arranged before the memory control section 246, and a construction in which the bit converting section is arranged between the memory control  
 5 section and the level shifter. Fig. 5 shows one example of a memory allocating method when the above bit converting section performs the 1-bit gradation display by using an n-bit signal. In Fig. 5, a value surrounded by a heavy line in a position of (n-1) in a memory for green (G) shows an image signal  
 10 in the two-gradation display.

For example, only the memory for green among memories for the three primary colors RGB is used by this memory allocating method, and the display of two gradations can be performed by using the value of a most significant bit of this  
 15 memory. When the image signal is constructed by color n-bits, an image signal of one bit for the monochromatic two-gradation display can be generated.

Fig. 6 is a view systematically showing an entire flow of signal processing in a portable information terminal by  
 20 including the judgment of a display mode, the generation of an image signal and transmission processing.

The portable information terminal 260 of Fig. 6A has at least a display mode judging section 250, a signal generating section 251, a signal processing switching section 106, at  
 25 least an n-bit memory, a first signal processing section having

00763806-022701

a digital-analog converter connected to the n-bit memory, at least a 1-bit memory, a second signal processing section having a level shifter connected to the 1-bit memory, and a display section 252 (corresponding to e.g., a liquid crystal cell 101)

5 for displaying an image. It is considered as an example of concrete constructions of the signal generating section and the display mode judging section that a CPU having a function of both the signal generating section and the display mode judging section is arranged, and the display mode judging section and the image signal generating section are arranged  
10 in software (a program for controlling the operation of a device) of the CPU. Otherwise, it is also considered as the above example that the display mode judging section and the image signal generating section are arranged as a system LSI  
15 including the CPU. It is further considered as the above example that the CPU is the signal generating section and the circuit section of a display mode judgment is separately arranged, etc.

In Fig. 6, the first and second signal processing  
20 sections are arranged, but may be combined with each other as a signal processing section, and two processing paths may be arranged within this signal processing section as mentioned above. Further, a signal processing switching section can be also included in the signal switching section of Fig. 6. The  
25 following construction can be also applied to the construction

shown in Fig. 4.

The display mode of Fig. 6 is set to have color multi-gradation (n-bit gradation) and monochromatic two gradations (1-bit gradation). However, the above low light  
5 emitting mode can be also added to this mode. A monochromatic signal may be set to gradation of n-bits. In this case, it is necessary to arrange a bit converting section before the level shifter or the 1-bit memory.

A processing flow in Fig. 6A will first be explained.  
10 First, the display mode judging section 250 judges the display mode (display state) in the display section by a button operation of a user and commands of a markup language, and sends judging commands to the image signal generating section. Thereafter, the image signal generating section generates an  
15 image signal corresponding to the display mode of the display section based on information transmitted from a wireless portion, etc., and a control signal for controlling an operation of the signal processing switching section, and transmits the generated signals to the signal processing  
20 switching means. Each of the generated signals is an n-bit signal for color in the case of the color multi-gradation, and is a 1-bit signal for monochromatic display in the case of the monochromatic two gradations. The signal processing switching section receiving the image signal and the control  
25 signal selectively switches a path of signal processing, i.e.,

09763806-022701

one of the first and second signal processing sections. The above selected signal processing section performs processing for converting the image signal to an analog signal, etc. Thereafter, the display section 152 displays an image by receiving the image signal. Thus, the display mode of the image can be arbitrarily switched, and convenience can be improved and power consumption can be reduced.

Switching timing of the display mode judged by the display mode judging section is not limited to the user's operation and the markup language, but timing in application, etc. is also considered as mentioned above. The display mode judging section 250 transmits commands to the signal generating section, but it is also included that the signal generating section recognizes a judgment of the display mode judging section, and no information transmitting direction is limited to one direction.

The signal generating section makes the image signal and the control signal, but information of the control signal can be included in the image signal as mentioned above. For example, an operation such as a switching operation performed by recognizing the bit of an image is considered. An operation such as an operation for reconverting a bit made by the signal generating section in accordance with the display mode, etc. is performed in this case.

Further, it is considered that switching instructions

are directly transmitted to the signal processing switching section while the display mode judging section transmits instructions to the signal generating section and an image signal corresponding to the display mode is generated. It is also considered that the image signal is generated irrespective of the display mode, but the display mode judging section judges the display mode of the display section and directly transmits instructions to the signal processing switching circuit section. This construction is effective when works of the signal switching and the image signal generation are independently made.

Fig. 6B will next be explained. The difference between Figs. 6A and 6B is that the driving section has the construction of Fig. 4, and the display mode judging section 250 directly transmits instructions to the signal switching section without transmitting instructions to the signal generating section. A processing flow will next be described.

First, the display mode judging section 250 judges the display mode (display state) in the display section by the button operation of a user and commands of the markup language, and transmits judging commands to the signal processing switching section. The signal processing switching section temporarily stores a transmitted image signal to the n-bit memory, and then transmits the image signal to selected one of the first and second signal processing sections. In this



case, when the signal switching section selects a level shifter side, it is sufficient to arrange a bit converting section and an image converting section for converting the image signal for color to an image signal for monochromatic display, and

5 no arrangement order of the bit converting section and the image converting section is limited. For example, this concrete processing is performed by the processing construction explained with reference to Fig. 5. The above selected signal processing section performs processing such as conversion from

10 the image signal to an analog signal, etc. Thereafter, the display section 152 displays an image based on the image signal. Thus, the image in an arbitrary display mode can be displayed even when the signal generating section generates the image signal corresponding to the same display mode at any time.

15 Accordingly, convenience can be improved and power consumption can be reduced.

Further, the driving circuit section 105 in this display unit also controls the operation of a backlight as a light emitting means, and the power consumption is also reduced in

20 view of this backlight control. This display unit will next be explained by using Figs. 7 and 8.

Fig. 7 shows the relation of a scanning period, a liquid crystal response period and a light source lighting period in an arbitrary subframe at a field sequential color display time.

25 In Fig. 7, the axis of abscissa shows time in each of waveforms.

5

10

15

20

25

09/16/80 08:05:02Z 701  
a scanning period required to scan m-gate lines, a liquid  
crystal response period required to make a sufficient response  
of the liquid crystal, and a light source lighting period for  
lighting the light source. Luminance depends on the intensity  
5 of transmitted light and a lighting time. Therefore, if the  
light intensity is the same, a brighter display state can be  
obtained as the light source lighting period becomes longer.  
However, the light source lighting period is determined by  
subtracting the scanning period and the liquid crystal response  
10 period from one subframe period.

The liquid crystal response period is set to prevent a  
deterioration in image quality due to luminance irregularities  
of a pixel. When no liquid crystal response period is set,  
light is immediately emitted from the light source after the  
15 scanning period. However, no response of the liquid crystal  
is yet stabilized in a lower portion (near  $K = m$ ) of a display  
area. Therefore, no desirable luminance can be obtained even  
when light is transmitted through this lower portion. As a  
result, a deterioration in image quality is caused.

20 The scanning period is set since there is a time  
difference between a time point for selecting a first gate line  
and a time point for selecting an m-th gate line. When no  
scanning period is set, a luminance difference is caused by  
lighting the light source in the scanning period between upper  
25 and lower portions ( $k=1$  and  $m$ ) of the display area even when

a response time of the liquid crystal is a negligible short time. Therefore, a deterioration in image quality is caused.

Accordingly, it is necessary to set the scanning period and the liquid crystal response period, and light the light  
 5 source after the liquid crystal of the  $m$ -th line makes a sufficient response.

As shown in Fig. 7, the scanning period is about one-third of the subframe period. Therefore, it is also useful to further  
 10 reduce power consumption by stopping the supply of a clock signal to a display driver between the liquid crystal response period and the light source lighting period.

Fig. 8 shows a change in light emitting intensity of the light source with the passage of time in each display mode. Fig. 8A shows a change in time of the light emitting intensity  
 15 in the field sequential color display. Fig. 8B shows a change in time of the light emitting intensity in low light emitting display. Fig. 8 proposes a power consumption method in the low light emitting display.

Fig. 8A shows an example in which the field sequential  
 20 color display is performed. In Fig. 8A, the axis of abscissa shows time and the axis of ordinate shows luminance. When the field sequential color display is performed, one of the light sources of the three primary colors (RGB) is sequentially lighted at least one time in a pulse shape every subframe period  
 25 140 in one frame period 143. Accordingly, the permutation of

09763806-022701

a monochromatic light pulse is formed within one frame period 143 in a time arrangement of the light pulses of the three primary colors. In this embodiment, the subframe periods of the three primary colors are arranged in an order of red, green and blue so that the light sources are also correspondingly sequentially lighted in the order of red, green and blue. The subframe order may be replaced and set to an order of red, blue and green, etc. In this case, the lighting order of the light sources is also correspondingly replaced. The number of subframe periods existing within one frame period can be also changed.

Fig. 8B shows a case in which the low light emitting display is performed. In this figure, the axis of abscissa shows time and the axis of ordinate shows luminance. In this specification, the low light emitting display shows a third display system in the invention, and shows an intermediate display mode between a display method for performing the light emitting display by turning-on the light source, and a display method for performing the reflection display by turning-off the light source. Namely, this display mode shows black-and-white or monochromatic display, and light emitting display although luminance is low. The light sources of the three primary colors are simultaneously lighted and are used as a white light source (W), and light (continuous light 163) continuous in time is used as light emitted from the light

source. The light intensity is set to be lower than that at the color display time to reduce power consumption.

This display mode can be easily realized by separately and independently switching on/off of the light source and the driving method.

This display mode has advantages in that power consumption is reduced by reducing frequency to frequency corresponding to frame driving, and a power amount of the light source can be reduced by reducing the light source intensity.

Namely, the light emitting display of low power consumption can be performed in comparison with a case in which the field sequential color light emitting display is performed. This is particularly effective in use for a long time in a dark place, and is effective to improve convenience as a portable device.

Fig. 8B shows an example of the black-and-white display in which all the red, green and blue colors are lighted. However, it is also possible to perform the monochromatic display in which only two or one color among the red, green and blue colors is lighted. Control for increasing the light source intensity

under a light environment and decreasing the light source intensity under a dark room environment may be also used by arranging a sensor for monitoring the intensity of environmental light. Thus, it is possible to prevent a reduction in color purity caused by superposing luminance of external light on luminance of the light source under the light

environment. Further, power consumption can be reduced while a sufficient visual recognizing property is obtained under the dark room environment. Further, it is useful to arrange a temperature monitor and control frame frequency in accordance with temperature, and switch the color light emitting display to the reflection display. This is because a liquid crystal response speed is reduced under an environment at a low temperature such as a below-zero temperature so that the possibility of a reduction in color reproducibility is caused. Thus, the frame frequency can be set to be low under the low temperature environment so that an influence on image quality due to the reduction in liquid crystal response speed can be prevented. Further, it is particularly useful to suitably replace the sequential time order of subframes every color every frame under the low temperature environment. Thus, it is possible to prevent a color unbalance caused by the reduction in liquid crystal response speed under the low temperature environment. Otherwise, the display unit may be also constructed such that the color display is compulsorily switched to the black-and-white or monochromatic display at a temperature equal to or lower than a constant temperature.

In the field sequential color driving used in this embodiment, the light source is lighted in a pulse shape so as to increase display luminance so that it is necessary to set peak power to be very high. Therefore, it is useful to

09763805-022701

arrange a precharge circuit for lighting the light source in a pulse shape by continuous power in a light source control section of the driving section 105. A charge pump operation is performed by an action of this precharge circuit, and it is possible to prevent a sudden load due to generation of the peak power from being applied to a storage battery. Thus, wearing of the storage battery is reduced, and a time of using a device can be lengthened.

Further, when a point light source such as an LED, etc. is used, an incident light ratio can be improved by forming a notch in an incident portion of light emitted from the LED in a light guide body. A widening angle of emitted light can be widened by forming a cylindrical lens on an emitting face of the LED, and uniformity of illumination can be improved. If the above light emission can be performed, a fluorescent tube of each of the three primary colors RGB, etc. can be also used.

As explained above, useless power can be reduced at the reflection display time and power consumption can be greatly reduced by arranging the driving section 105 having the signal processing sections 112, 113 and the signal processing switching means 106 in the display unit.

The display element 101 in this embodiment will next be explained.

As mentioned above, one of features of this display unit



is that the driving section 105 having a switching means of the signal processing method is arranged to reduce power consumption. However, since plural display states are set by switching the signal processing section, it is necessary to  
5 devise the display element 101 in accordance with each of the display states. Accordingly, the display element corresponding to both the display states of the light emitting display and the reflection display and which can improve image quality will next be explained.

10 Fig. 9 is a cross-sectional view of the display element 101 in the display element of this embodiment. Fig. 9A shows the display element 101 at the color light emitting display time, and Fig. 9B shows the display element 101 at the reflection display time.

15 The display element 101 in Fig. 9 is constructed by including a liquid crystal cell 132 and a backlight 129. The liquid crystal cell 132 corresponds to the light polarizing state modulating means 102 in Fig. 1, and the backlight 129 corresponds to the color light emitting means 103 and the  
20 external light reflecting means 104 in Fig. 1.

A structure of the liquid crystal cell 132 in Figs. 9A and 9B will first be explained.

The liquid crystal cell 132 is constructed by including a first light polarizing plate 120, a transparent substrate  
25 121 having an unillustrated transparent electrode, etc., a

00763806-022701

liquid crystal layer 122, an active matrix substrate 123 having an unillustrated active matrix for operating the liquid crystal layer, and a second light polarizing plate 124.

A twist nematic mode for setting a twist angle to 90 degrees is adopted in the liquid crystal layer 122. An orientation film for orientating the liquid crystal is formed on liquid crystal layer contact sides of the transparent substrate 121 and the active matrix substrate 123 although this construction is omitted in Fig. 8. Further, a cell gap as the distance between the transparent substrate 121 and the active matrix substrate 123 is set to 2  $\mu\text{m}$  in consideration of high speed responsibility of the liquid crystal. If the field sequential color display can be performed, another display mode can be also applied naturally. When the display element is used in a portable information terminal, there are many cases in which this display unit is seen from a lower side. Therefore, an angle of visual field is symmetrically set on left-hand and right-hand sides, and is set to be wide from the lower side, and is set to be narrow on an upper side so that convenience is usefully improved. These constructions can be adjusted by a rubbing angle.

The active matrix substrate 123 has a display portion in which pixels are arranged in a matrix shape. A transistor as an active element is arranged in each pixel. In this display element, a transistor using amorphous silicon is used as one

09763806-022701

example, but any one of amorphous silicon, polycrystal silicon and monocrystal silicon may be also used as a semiconductor material forming an active element such as a transistor, etc. When amorphous silicon and polycrystal silicon are used, a  
5 glass substrate is normally used. Accordingly, in this embodiment, the glass substrate is used as the active matrix substrate 123. As a making method of the active matrix substrate, there are a method for arranging the active element in an epitaxial growing layer of monocrystal silicon formed  
10 on the glass substrate, and a method in which an active matrix circuit structure formed on a monocrystal silicon substrate in advance is separated by a lift-off method and is stuck onto the glass substrate.

Next, the backlight 129 (corresponding to the color light  
15 emitting means 103 and the external light reflecting means 104 in Fig. 1) in Figs. 9A and 9B will next be explained. The backlight 129 in the embodiment 1 has both a function for guiding light from a white LED as a light source to the liquid crystal cell 132 by scattering this light, and a function as  
20 a reflection plate for reflecting external light 109 incident through the liquid crystal cell 132.

The backlight 129 sequentially has a light polarizing maintaining type scattering layer 125, a light guide body 126 and a light polarizing maintaining scattering reflection plate  
25 127 from a side of the liquid crystal cell 132. The backlight

129 is constructed by arranging a white LED 128 which can perform field sequential lighting of the three primary colors on a side face of the light guide body 126. The light polarizing maintaining scattering layer 125 has a function for scattering transmitted light, but approximately maintaining a light polarizing state before and after the transmission. The light polarizing maintaining scattering layer 125 may be basically constructed by a layer in which light absorption in an entire visible ray area is very small, and refractive index is slightly changed in an order approximately equal to or smaller than a wavelength of light on a layer face in a thickness direction, and has a distribution. Concretely, for example, it is possible to apply a film formed by dispersing particles of a material slightly different in refractive index from a medium into a polymer film and resin, a hologram made by using a photosensitive material to an ultraviolet ray, etc., a layer using a material formed by dispersing particulates of a material slightly different in refractive index from an adhesive into resin such as an adhesive, a prism sheet having a scattering property, etc. When the prism sheet is applied, the prism sheet can function as a reflection plate of external light. The light polarizing maintaining type scattering reflection plate 127 has a function for reflecting and scattering light, but approximately maintaining a light polarizing state before and after the reflection. In a

09753808-022701

structure of the light polarizing maintaining type scattering reflection plate 127, for example, fine irregular faces are formed on the surface of a light guide body, and a high reflectivity metallic plate of aluminum, etc. is formed by the evaporation method, the sputtering method, etc. It is useful in uniformity of luminance to provide a distribution on a face with respect to the above fine irregular shape, and it is particularly useful to make emitted light 108 from the light source arranged on a side face uniformly incident to the liquid crystal cell 132. As another concrete constructional example of the light polarizing maintaining scattering reflection plate 127, there is an example in which the light guide body 126 and the reflection plate are adhered to each other by an adhesive, and particles of resin, glass, etc. slightly different in refractive index from the adhesive are dispersed into the adhesive. Further, it is also considered that a polymer type liquid crystal layer nipped between transparent electrodes is applied, and a scattering state and a transmitting state are switched by electric control, and the scattering state is set at the color light emitting display time, and the transmitting state is set at the reflection display time. In this case, a reduction in color purity caused by superposing white external light can be prevented, and it is particularly effective to consider use under a bright environment such as outdoors, etc.

09763806-022701

The above light polarizing maintaining scattering layer 125 and the light polarizing maintaining type scattering reflection plate 127 may be arranged as one portion of the light guide body as mentioned above, and may be also arranged as a layer separated from the light guide body. This is because the point in this arrangement is to maintain the light polarizing states of incident light and reflected light.

When a point light source such as an LED, etc. is used, the light polarizing state is maintained in the light guide body itself, and it is further preferable to use a light guide body having a scattering property. In this case, an effect of making a locus of light inconspicuous is obtained. It is considered that a construction for providing the scattering property is similar to that of the light polarizing maintaining scattering layer 125. However, it is necessary to set the scattering property of the light guide body to be weaker than that of the light polarizing maintaining scattering layer so as to maintain a light guide property of the light guide body. For example, it is necessary to devise the light guide body such that the density of particles dispersed into the above resin is reduced, etc. In this meaning, the light guide body may be called a second light polarizing maintaining scattering layer. In this case, the light scattering property can be provided by forming a groove on an entire lower face of this light guide body. Further, when this groove is formed in a

prismatic shape, the light guide body can function as a reflection plate of external light.

Operations and effects of the display element in the embodiment 1 at the color light emitting display time and the reflection display time will next be explained.

First, the display element at the color light emitting display time in Fig. 9A will be explained.

An LED 128 of each of the red, green and blue colors provided in the white LED 128 as a light source is sequentially  
10 lighted in time, and emitted light 108 is incident to the light guide body 126. The incident emitted light 108 is scattered and reflected on the light polarizing maintaining type scattering reflection plate 127 and the light polarizing maintaining type scattering layer 125, and is uniformly  
15 irradiated to the entire liquid crystal cell 132. The display section in the liquid crystal cell 132 synchronizes image information every color with the emitted light 108 of each of the red, green and blue colors emitted from the above white LED 128, and displays an image in the field sequential system.  
20 The emitted light 108 transmitted through the liquid crystal cell is shifted in time in each of the red, green and blue colors, and is emitted in monochromatic color. However, an observer recognizes this emitted light as a color image by afterimage effects of eyes. This state is represented as the color light  
25 emitting display. In the embodiment 1, a diffusion means and

09763806.02701

a diffusion reflection means are arranged such that the light guide body 126 is nipped. Therefore, the emitted light 108 can be approximately uniformly incident to the liquid crystal cell 132 at any time. Further, since no color filter is used,

5 high light utilization efficiency can be obtained.

The display element at the reflection display time in Fig. 9B will next be explained. Since no display element in the embodiment 1 has a color filter, the black-and-white display is set at the reflection display time.

10 In the black-and-white display, no white LED 128 is lighted, and external light 109 is used as the light source. The external light 109 is sequentially transmitted through the liquid crystal cell 132 and the light polarizing maintaining scattering layer 125, and is reflected on the light polarizing

15 maintaining scattering reflection plate 127 arranged in the light guide body 126. The external light 109 is again transmitted through the light polarizing maintaining scattering layer 125, and is modulated in luminance by the liquid crystal cell 132. Thereafter, the external light 109

20 is recognized as image information in observer's eyes.

In the embodiment 1, the light polarizing state is maintained by arranging the light polarizing maintaining scattering layer 125 and the light polarizing maintaining scattering reflection plate 127 to brightly hold the reflection

25 display. These contents will next be explained.

09763806.022701  
10/22/20 90839260



First, the external light 109 used as the light source is transmitted through first and second light polarizing plates 120, 124 of the liquid crystal cell 132. In this case, the external light 109 is absorbed by the first light polarizing plate 120, modulated by a liquid crystal layer 233, and absorbed by the second light polarizing plate 124 so that the external light 109 attains a light polarizing state. The external light 109 in the light polarizing state is then diffused and reflected on the light polarizing maintaining scattering layer 125 and the light polarizing maintaining scattering reflection plate 127. The external light 109 is again incident to the liquid crystal cell 132 so that image information is obtained. However, in a case in which no light polarizing state (in an axial direction of a second polarizer 124 through which the reflected light is easily transmitted) is maintained when the reflected light 110 is again incident to the liquid crystal cell 132, a light polarizing component shifted from a light polarizing direction is caused. Therefore, this shifted light polarizing component is again absorbed by the second light polarizing plate 124 of the liquid crystal cell 132 so that brightness is lost by this absorption. Accordingly, it is necessary to maintain the light polarizing state of the external light 109 before and after the reflection and the diffusion within the backlight 129. Therefore, in this embodiment, the light polarizing maintaining scattering layer

125 and the light polarizing maintaining scattering reflection plate 127 are used. When a sufficient scattering state is obtained by the first and second light polarizing maintaining scattering layers, the light polarizing maintaining scattering reflection plate 127 may be also set as a mirror face.

Light is also scattered and reflected by arranging the light polarizing maintaining scattering layer 125 and the light polarizing maintaining scattering reflection plate 127 to reduce the problem of a double image caused by parallax, etc.

The problem of the double image, etc. will first be explained.

In a conventional reflection type liquid crystal display having a structure in which a liquid crystal cell sticking light polarizing plates onto its both faces is arranged and a reflection plate is also arranged outside the liquid crystal cell, a white image (light image) is formed on a surface of the reflection plate, and a black image (dark image) is formed in the position of a first light polarizing plate 120 stuck onto an observer's side. Accordingly, when these images are observed in a slanting direction shifted from a substrate normal line of the liquid crystal display, the display image is seen such that the forming positions of the white and black images are shifted (are floated upward). Accordingly, a problem exists in that a double image caused by parallax is

seen.

Further, in a case in which the external light 109 reaches the observer by passing different pixels when the external light 109 is incident to the liquid crystal display and after  
5 the external light 109 becomes reflected light 110, brightness levels and luminance levels of the passing pixels at the incident and reflection times are averaged and recognized by the observer. Accordingly, when the white and black images are adjacent to each other, a pixel to be originally seen white  
10 looks slightly dark, etc. Therefore, luminance fuzz of the display image is recognized, and a deterioration in image quality is caused. This problem becomes further serious in the liquid crystal display using a color filter. Namely, when the external light and the reflected light pass through color  
15 filters of different colors, the color filters absorb the different color lights in nature. Accordingly, light can be hardly transmitted, and brightness of the display image is greatly reduced together with the luminance fuzz of the display image.

20 These problems become notable as the thickness of a glass substrate constituting the liquid crystal cell is increased, and the distance between the display element and the reflection plate is increased. Therefore, a deterioration in image quality is caused. Accordingly, it is necessary to reduce the  
25 thickness of the glass substrate and the distance between the

03753806 "032701  
10/2/2006 9:08:59 AM

display element and the reflection plate so as to prevent this deterioration in image quality.

In this viewpoint, the invention has a structure in which the light emitting means is arranged in front of the reflection plate. Accordingly, a problem of increasing the distance between the forming position (reflecting position of the external light) of the white image and the forming position (the position of the light polarizing plate) of the black image remains. However, this problem is solved in the invention by arranging the light polarizing maintaining type scattering layer 125 between the liquid crystal cell 132 and the light guide body 126 to make the image forming positions of the white and black images approach each other. In this embodiment 1, no color filter is arranged. Accordingly, the problem of light interruption due to the color filter is naturally solved, and the problems of the so-called double image and the luminance fuzz are also solved so that the deterioration in image quality is prevented. These operational effects will next be explained.

First, the external light 109 is transmitted through the first light polarizing plate 120 of the liquid crystal cell 132, the liquid crystal layer 122 and the second light polarizing plate 124. After light and dark image information is obtained, the external light 109 is transmitted through the light polarizing maintaining scattering layer 125, and is

reflected on the light polarizing maintaining scattering reflection plate 127. The external light 109 is again transmitted through the light polarizing maintaining scattering layer 125 so that the external light 109 is scattered plural times. This light again has an approximately uniform intensity distribution. This uniformed light is once transmitted through the liquid crystal cell 132, and an observer recognizes this light as an image. In this case, the black image is formed in the first light polarizing plate 120, and the white image is formed between the liquid crystal cell 132 and the light guide body 126, i.e., in a position of the light polarizing maintaining scattering layer 125. As a result, the distance between the white and black images can be shortened. Thus, the double image due to parallax and the luminance fuzz due to the averaging of brightness can be dissolved, and a display element of high image quality can be obtained. The light polarizing maintaining scattering reflection plate 127 as a reflecting means does not necessarily have a scattering means to obtain the above effects of making the image forming distances approach each other. However, it is more desirable that the reflecting means also has the scattering means in consideration of a viewpoint in which the uniform property of emitted light of the backlight at the light emitting display time is obtained.

The problems of the double image due to parallax, the

luminance fuzz, the light interruption due to the color filter, etc. can be solved for the first time by using the construction in the embodiment 1 from the above description while light efficiency is increased. Accordingly, it is possible to

5 obtain a display element in which both the color light emitting display and the reflection display with high image quality can be performed by one display element. Power consumption can be also reduced by only the driving circuit section 105. Therefore, when it is sufficient to obtain effects of only the

10 driving circuit 105, for example, it is also possible to use a reflection type display element of a front light type as the display element 101 in addition to the display element 101 in the invention. In the present system, negativity and positivity of the image are not inverted at the color light

15 emitting display time and the reflection display time. Therefore, no contrast ratio is easily reduced even when the external light is superposed on light from the white LED 128 as a light source at the field sequential color display time. Image display easily visualized (having high tolerance) can

20 be performed at any time under various environments of different brightness levels.

As mentioned above, if the driving circuit section 105 and the display element 101 explained in this embodiment are used, it is possible to realize a bright display unit in which

25 power consumption is low, and contrast is high in each of the

09763806-022701

light emitting display and the reflection display.

(Embodiment 2)

An embodiment 2 of the display unit in the invention will next be explained by using Fig. 10.

5       The display unit of this embodiment is constructed such that the field sequential color display can be also performed at the reflection display time. This display unit is characterized in that a second liquid crystal cell 133 is newly arranged on the liquid crystal cell 132 of the display unit  
10 in the embodiment 1. In this embodiment, various voltages are superposed and applied to this second liquid crystal cell 133 and a birefringence amount of this liquid crystal cell is changed so that a transmission spectrum is arbitrarily adjusted and is utilized as a switchable color filter. In another  
15 example of the switchable color filter, a tunable filter of COLORLINK Corporation, etc. are also preferable.

Fig. 10 shows a state in which the second liquid crystal cell 133 functions as a red(R) color filter at the reflection display time. In this embodiment, the voltage applied to the  
20 liquid crystal cell is changed by synchronizing these filter colors sequentially changed and the field sequential image display. The color display corresponding to each subframe is sequentially performed so that an image is displayed in color.

A light amount is reduced by this construction since the  
25 color filter is used. However, since this construction is

00763806-022701  
10/23/06

combined with the display unit in the embodiment 1, it is possible to obtain display in which the above effects are obtained, i.e., the double image caused by parallax and the luminance fuzz due to averaging of luminance are removed.

- 5 Since an entire face has a single color, there is no case in which the colors of transmitting filters of the incident light and the reflected light are different from each other. Therefore, the above problem of light interruption of the color filter caused by parallax is not caused. Accordingly, it is possible to sufficiently perform bright color image display with high image quality in comparison with the display unit using the normal color filter.

- It is considered as one of optimum utilization modes of the display unit having the above effects that the above reflection type field sequential color display is performed at the reflection display time, and the bright field sequential color light emitting display described in the embodiment 1 is performed without using the switchable filter at the color light emitting display time. In this case, it is desirable to arrange a filter switching circuit section for switching use and unuse of the switchable color filter in the driving switching circuit section 106 in accordance with necessity. Concretely, there is a method in which an organic LED selection switch (light source selection switch) and a liquid crystal selection switch for selecting the second liquid crystal cell



133 are independently arranged, and the color light emitting display and the reflection display are switched in accordance with necessity of a user or device control software. The color filter can be also unused and the above reflection black-and-white mode can be also used at the reflection time in accordance with necessity of the user, etc.

It is possible to realize bright image display with reduced power consumption by using the above construction at each of the color light emitting display time and the reflection display time.

(Embodiment 3)

An embodiment 3 of the display unit in the invention will be explained by using Fig. 11. Fig. 11 is a cross-sectional view of a display element of the embodiment 3. Fig. 11A shows the case of a color light emitting display mode, and Fig. 11B shows the case of a reflection display mode.

In the embodiment 2, the display unit in each of Figs. 11A and 11B is constructed by including a light polarizing plate 120, a phase plate 170, a glass substrate 121 having a transparent electrode 171, a liquid crystal layer 122, a liquid crystal pixel electrode 172, an organic LED anode electrode 174, an organic LED layer 175, an organic LED cathode electrode 176, a transistor 179, a wiring layer 178 for making electric connection between transistors 179, between the transistor 179 and the liquid crystal pixel electrode 172, and between an

unillustrated another transistor and the organic LED cathode electrode 176, etc., insulating layers 173, 177 arranged between wires, an active matrix substrate 180 in which pixels constructed by the transistor 179, etc. are formed in a matrix shape, etc.

The transparent electrode 171, the liquid crystal pixel electrode 172 and the organic LED anode electrode 174 are formed by indium tin oxide (ITO). The liquid crystal layer 121 is a liquid crystal layer of twist nematic orientation. In the orientation of this liquid crystal layer, another mode can be also used if it is another liquid crystal display mode which can perform the reflection type display of a single light polarizing plate type. A polycarbonate film extended in a specific direction and having a birefringence property is used as the phase plate 170. A polyvinyl alcohol film, a polystyrene film, etc. are also suitable as another material of the polycarbonate film.

The relation of the display unit of the embodiment 3 shown in Fig. 11 and the display unit shown in Fig. 1 will be explained here. The liquid crystal layer 122 corresponds to the light polarizing state modulating means 102, and the organic LED layer 175 corresponds to the color light emitting means 103, and the organic LED cathode electrode 176 corresponds to the reflecting means 104.

Detailed contents of Figs. 11A and 11B will next be

explained.

Fig. 11A shows a case in which the color light emitting display is performed in the display element. In the display element, the organic LED layer 175 is operated, and light 108 is emitted to the exterior of the display element. In the color display, the organic LED layer of one of the three primary colors RGB is formed in each subpixel, and the three subpixels of RGB are set as one pixel, and luminance of each subpixel within each pixel is arbitrarily adjusted. In the embodiment 3, the reflection type display system of a single light polarizing type and a normally black mode for performing black display at a voltage unapplication time are adopted. Accordingly, the phase plate 170 and the liquid crystal layer 122 can be entirely equivalently operated as a one-fourth wavelength plate at a lighting time of the organic LED 175. Namely, even when external light 109 is incident to the display element, a light polarizing state of the incident light is modulated by the phase difference plate 170 and the liquid crystal layer 122 and is absorbed to the light polarizing plate 140. Therefore, no reflected light is finally emitted to the exterior of the display element, and no external light is offset and superposed. Accordingly, it is possible to obtain an effect in which a deterioration in the contrast ratio of a color light emitting image is prevented.

Fig. 11B shows the case of the reflection display mode,

and shows a state in which the liquid crystal layer 121 is operated, and the external light 109 is modulated in intensity and is simultaneously reflected, and an image is displayed by the reflected light 110. In this case, the organic LED cathode electrode 176 functions as a reflection plate.

In a use in which it is sufficient if necessary and sufficient contrast is obtained, an effect of an increase in numerical aperture, i.e., luminance is obtained by omitting a black matrix. Further, in this case, it is unnecessary to align upper and lower substrates so that a panel is easily made and cost is reduced. On the other hand, in a use in which a deterioration in contrast is prevented, the black matrix can be naturally used. Further, the display unit can be usefully constructed such that a cell gap can be set with high accuracy, and it is unnecessary to align the substrates with each other by using a spacer for controlling the thickness between the substrates as a column structure.

The display unit of the embodiment 3 respectively performs display by a luminance adjustment of the organic LED at the color light emitting display time, and a luminance adjustment of the liquid crystal at the reflection display time. Accordingly, power consumption can be reduced, and bright image display can be realized. Further, a reflection electrode layer of the organic LED layer can be also used as a reflection plate in the liquid crystal display element by arranging the

organic LED layer and the liquid crystal layer on the same substrate. Further, since a necessary element is formed between a pair of substrates, there is an advantage in that the display element can be entirely reduced in thickness.

5 Furthermore, since the forming position of a black image (dark image) and the forming position of a white image (light image) can be set to approach each other, there are also advantages in that the above problems about the double image caused by parallax and the luminance fuzz due to averaging of luminance  
10 can be removed. Further, since no color filter is arranged, no problem of light interruption of the color filter caused by parallax is naturally caused.

In a concrete example of switching of the display method, it is considered that an organic LED selection switch and a  
15 liquid crystal selection switch are independently arranged, and the color light emitting display and the reflection display are switched in accordance with necessity of a user, etc. This construction will next be explained.

Fig. 12 is a view showing an equivalent circuit of a pixel  
20 in the display element of the embodiment 3.

An area surrounded by a broken line shows one subpixel 202, and the actual display section is constructed such that this subpixel 202 is arranged longitudinally and transversally by a predetermined desirable number in a matrix shape.

25 Each pixel includes at least a first transistor 179, a

holding capacitor 196, a liquid crystal layer 122, an organic LED layer 175 and a second transistor 198. An organic LED selection switch 194 and a liquid crystal selection switch 201 are arranged outside the pixel.

5           The organic LED selection switch 194 is connected to an unillustrated electric current supply source, and the liquid crystal selection switch 201 is connected to a portion having a common electric potential. A drain and a gate of the first transistor 179 are respectively connected to a data line 191  
10           and a scanning line 190. This transistor 179 sample-holds a signal  $V_d$  of the data line 191 by the timing of a selection pulse inputted from the scanning line 190 to the gate. Namely, this electric potential is written to the holding capacitor 196 arranged between the transistor 179 and common wiring 200.

15           When the organic LED selection switch 194 is turned on and the liquid crystal selection switch 201 is turned off, an operation of the second transistor 198 is controlled by the signal  $V_d$ , and an electric current is supplied to the organic LED layer 175 by the electric current supply line 193, and the  
20           organic LED layer 175 emits light at specific intensity in accordance with an electric current value. The electric current value may be constantly set, and light emitting luminance may be also adjusted by time width.

          In this state, no voltage is applied to the liquid crystal  
25           layer 122 so that no liquid crystal layer 122 is operated.

Namely, this state shows that the color light emitting display is performed by only the light emitting luminance of the organic LED layer. As mentioned above, since the liquid crystal layer 122 in this state functions as a one-fourth wavelength plate, the display unit can perform high image quality display of high contrast.

In contrast to this, when the organic LED selection switch 194 is turned off and the liquid crystal selection switch 201 is turned on, the liquid crystal layer 122 is operated by the signal Vd, and no organic LED layer 175 emits light since the second transistor 198 is turned off. Namely, the reflection display is performed by reflection of the external light and the effect of luminance modulation of this external light using the liquid crystal layer.

Operations of the organic LED layer 175 and the liquid crystal layer 122 can be arbitrarily switched by using such a construction in accordance with necessity. Further, the color light emitting display and the reflection display using the operation of the liquid crystal layer can be easily switched by arranging the respective subpixels 202 of the three primary colors RGB in parallel with each other and independently operating the subpixels 202. When the reflection display may be set to the black-and-white display, it is sufficient to arrange only one liquid crystal pixel electrode 172 for operating the liquid crystal layer 122 in three subpixels, and

it is also sufficient to arrange only one first transistor 179 connected to this liquid crystal pixel electrode 172 in three subpixels. In this case, the number of pixels operated at the black-and-white reflection display time can be set to one-third in comparison with the color light emitting display so that power consumption can be greatly reduced.

(Embodiment 4)

A display element in an embodiment 4 will be explained by using Fig. 13.

The display element of the embodiment 4 is constructed by including a first light polarizing plate 120, a phase plate 170, a glass substrate 121, a liquid crystal layer 122, a liquid crystal pixel electrode 172, insulating layers 210, 211, an organic LED layer 175, an organic LED cathode electrode 176, common wiring 200 common to both the liquid crystal layer 122 and the organic LED layer 175, an active matrix substrate 180 in which pixels constructed by a transistor, a wiring layer, etc. are formed in a matrix shape although this shape is not illustrated, etc. A wiring layer and a transistor under the organic LED cathode electrode 176 are omitted for brevity in Fig. 12.

The liquid crystal pixel electrode 172 and the common wiring 200 are formed by ITO. The liquid crystal layer 122 has an orientation film and is a liquid crystal layer of homogeneous orientation although this construction is not

09762806.022701



illustrated. An organic LED layer for emitting any one of the three primary colors RGB is formed in each of the subpixels arranged in parallel with each other. At the light emitting display time, the color display can be performed by arbitrarily modulating luminance levels of the three subpixels of RGB.

The embodiment 4 is characterized in that the common wiring 200 is arranged between the organic LED layer and the liquid crystal layer 122. The common wiring required in each of the organic LED layer 175 and the liquid crystal layer 122 can be commonized by this construction. Further, an in-plane switching system for operating the liquid crystal by an electric field component parallel to the substrate can be adopted as the liquid crystal display system. In this case, it is necessary to adjust a liquid crystal material and the thickness of the liquid crystal layer so as to obtain a preferable contrast ratio in the display of the reflection type. Further, it is also necessary to arrange the phase plate 170 in accordance with necessity. In the embodiment 4, the phase plate 170 is a one-fourth wavelength plate, and the reflection display having preferable characteristics in angle of visual field can be obtained by adopting the in-plane switching system.

The circuit construction of a pixel section of the display element in the embodiment 4 will be explained by using Fig. 14.

An area surrounded by a broken line shows a one subpixel  
202.

Each subpixel is constructed by including at least a  
first transistor 179, a second transistor 198, a third  
5 transistor 214, a fourth transistor 215, a holding capacitor  
196, an organic LED layer 175 and a liquid crystal layer 122.  
An organic LED selection switch 194 and a liquid crystal  
selection line 212 are arranged outside the subpixel.

09763806.022701  
10 The organic LED selection switch 194 is connected to an  
electric current supply source. Each of the first, second and  
third transistors is an NMOS (n-channel Metal Oxide  
Semiconductor), and the fourth transistor is a PMOS (p-channel  
MOS). A drain and a gate of the first transistor 179 are  
respectively connected to a data line 191 and a scanning line  
15 190. Gates of the third and fourth transistors are  
respectively connected to the liquid crystal selection line  
212.

A case in which the organic LED selection switch 194 is  
turned on and the liquid crystal selection line 212 is set to  
20 be low in voltage, will be explained. First, a signal  $V_d$  of  
the data line 191 is sample-held by the timing of a selection  
pulse inputted to the gate of the first transistor 179 through  
the scanning line 190. Concretely, the signal  $V_d$  is written  
to the holding capacitor 196 arranged between the data line  
25 191 and organic LED common wiring 216. An electric current

supplied from common wiring 200 is applied to the organic LED layer 175 by controlling an operation of the second transistor 198 by a voltage of the signal  $V_d$  written to the gate holding capacitor 196. Thus, the organic LED layer 175 emits light at specific intensity in accordance with this electric current value. The electric current value can be constantly set, and light emitting luminance can be also adjusted by time width.

At this time, the third transistor is turned off, and no voltage  $V_d$  of the holding capacitor 196 is applied to the liquid crystal layer 122. However, since the fourth transistor 215 is turned on, both ends of the liquid crystal layer 122 are connected to the common wiring 200. Accordingly, the voltage applied to the liquid crystal layer 122 becomes 0 Vrms so that the liquid crystal layer 122 is not operated, and contributes to an improvement of contrast ratio as a one-fourth wavelength plate.

When the organic LED selection switch 194 is turned off and the liquid crystal selection line 213 is set to be high in voltage, the fourth transistor 215 is turned off and the third transistor 214 is turned on. Therefore, the liquid crystal layer 122 is operated by the signal voltage  $V_d$  written to the holding capacitor 213. At this time, since the second transistor 198 is turned off, no organic LED layer 175 emits light. Accordingly, the reflection display using the liquid crystal layer can be performed.

The display element using the in-plane switching can be made by the above construction, and operations of the organic LED layer 175 and the liquid crystal layer 122 can be arbitrarily switched in accordance with necessity. Further, the color light emitting display and the reflection display of the liquid crystal operation can be easily switched by independently adjusting light emitting luminance levels of the respective subpixels of the three primary colors RGB arranged in parallel with each other.

Fig. 15 is a view showing one subpixel 202 in one example of the layout of a pixel structure in the embodiment 4.

A display section is constructed by longitudinally and transversally arranging subpixels 202 by a required number in parallel with each other. The construction of each subpixel is similar to that in Fig. 14.

The holding capacitor 196 is formed by crossing a source electrode of the first transistor and the organic LED common wiring 216. The holding capacitor 213 is formed by crossing the liquid crystal pixel electrode 172 and the common wiring 200. In Fig. 15, the organic LED anode electrode 176 and each of the first to fourth transistors 179, 198, 214, 215 are not overlapped. However, numerical aperture can be increased by overlapping the organic LED anode electrode 176 on the above transistors. The liquid crystal pixel electrode 172 can be also overlapped on the above transistors.

(Embodiment 5)

Fig. 16 shows a cross-sectional view of a display element of an embodiment 5. The embodiment 5 is characterized in that common wiring 200 is arranged approximately on the entire face of a lower portion of the liquid crystal pixel electrode 172. A light emitting area of the organic LED layer 175 is formed approximately in an entire area of pixels by this construction so that high numerical aperture can be realized, and luminance can be increased.

10 (Embodiment 6)

Fig. 17 is a typical view of the external appearance of a portable phone having the display unit as an embodiment 7 of the invention.

Fig. 17A shows a state in which information is monochromatically displayed in the display element 101 at a so-called "standby time" such as a time at which the portable phone 200 waits for an operation, etc.

Fig. 17B shows a state displaying information in color in the display element 101 at a so-called "using time" such as a signal reaching time, etc. In this concrete example, a talking partner is displayed.

The portable phone 220 of the embodiment 6 is constructed by including an antenna 221, a speaker 222, a display element 101, a key 223 such as a ten-key, etc., a microphone 224 and a camera 227 in each of Figs. 17A and 17B.

In a using mode of the portable phone, it is general to display the remaining amount of a storage battery by an icon 225 even at the standby time, and display time at any time. In the future, a function of the portable phone as a portable information terminal will be provided and, for example, a using form for displaying a schedule at any time can be also sufficiently considered.

However, in the display method at the so-called standby time, it is sufficient to perform character display and icon display to a necessary minimum limit. Therefore, it is sufficient to perform black-and-white display or monochromatic display, and a time ratio at the standby time is generally larger than that at the using time. In consideration of such situations, a most important performance required at the standby time is to reduce power consumption. Accordingly, the display system at the standby time is suitably a reflection type display system.

Fig. 18 is a block diagram of a main construction of the portable phone 220 of the embodiment 6.

The portable phone 220 of the embodiment 6 is constructed by including an antenna 221, a wireless section 230, a talking processing section 233, a voice processing section 232, a control section 231 of the entire device, a camera 227, a speaker 222, a microphone 224, a key 223 such as a ten-key, etc., a display unit 100 using the invention, an unillustrated

storage battery, etc. The control section 231 of the entire device judges the display state of an image (e.g., color display, monochromatic display), and generates an image signal or a control signal according to each display state, and transmits this generated signal to a driving circuit section. In this specification, the judgment of the display state also includes an operation switched by timing.

As already described, the display unit 100 of the invention is constructed by including the driving circuit section 105 and the display element 101. The control section 231 of the entire device and the driving circuit section 105 can be partially or entirely overlapped with each other in a certain case in generation, conversion, transmission and reception of the image signal, control of clock frequency, etc. For example, there is also a case in which the driving section 105 is made within the control section of the entire device.

The driving circuit section 105 in the display unit 100 of the embodiment 6 has a driving method switching circuit section for switching the color light emitting display and the reflection display. In a switching condition of the display state, there are at least two cases constructed by a switching case from the color light emitting display to the reflection display, and a switching case from the reflection display to the color light emitting display.

For example, there are the following timings as switching

timing from the reflection display or the black-and-white reflection display to the color light emitting display. In main timing, there is a specific operation of a user such as the following (1a) to (1g), and timing such as (1h) to (1k) can be also set to switching timing. A judgment about the switching timing of the color light emitting display and the reflection display is made by one of the control section 231 and the display unit 100, or both the control section 231 and the display unit 100 in cooperation with each other.

- 10 (1a) When a specific key is pushed down.
- (1b) When a folding state is switched to an open state.
- (1c) When a slide type cover and a strap cover are set to an open state.
- (1d) When a display section is exposed (a terminal having a
- 15 structure in which the display section is closed at an unusing time).
- (1e) When a specific voice is sensed (a terminal having a voice recognizing function).
- (1f) When a specific area of a touch panel is pushed down (a
- 20 terminal having the touch panel).
- (1g) When a dial is operated (a terminal having rotation, pushing-down and the dial).
- (1h) When a signal arrives.
- (1i) When an infrared signal is received (a terminal having
- 25 an infrared interface such as IrDA, etc.)



(1j) When a color image is received at a data communication time.

(1k) When a time preset by a user and application has passed.

(1l) When talking is terminated.

5           Conversely, for example, there are the following timings as switching timing from the color light emitting display to the reflection display or the black-and-white reflection display.

(2a) When a specific key is pushed down.

10       (2b) When an open state is switched to a folding state.

(2c) When a slide type cover and a strap cover is closed.

(2d) When the remaining amount of a storage battery is equal to or smaller than a constant value.

(2e) When a specific voice is sensed (a terminal having a voice  
15       recognizing function).

(2f) When a specific area of a touch panel is pushed down (a terminal having the touch panel).

(2g) When a dial is operated (a terminal having rotation, pushing-down and the dial).

20       (2h) When talking is terminated.

(2i) When an infrared signal is received (a terminal having an infrared interface such as IrDA, etc.)

(2j) When image data are constructed by only a character such as a text and an icon, etc.).

25       (2k) When a time preset by a user and application has passed.

(21) When talking is started.

No switching timing is limited to only the timings described in the embodiment 6.

In another example of the above switching timing, control  
5 of the portable phone utilizing a connection service to the Internet such as the World Wide Web (hereinafter called WWW) is also considered. This construction will next be explained.

A WWW site is normally described by HTML (Hyper Text Markup Language) as one kind of a markup language in which tag  
10 information describing the attribute of a text and an image in a sentence is buried into the sentence. Software normally called a browser is used to display this WWW site in the display unit of a terminal of a person getting access to the WWW site. This browser has a function for referring to the tag information  
15 buried into the HTML, and displaying the text and the image in the sentence, etc. by a shaping arrangement. Processing of the HTML is large in burden in an arithmetic unit of a device in which low power consumption of the portable information terminal, etc. is important. Therefore, a new markup language  
20 considering a reduction in burden such as a Compact HTML released by W3 Consortium, an MML (Mobile Markup Language) released by SFC research consortium MOBIDY project of keio-Gijyuku University, etc. is developed. Practical use of these languages in the portable information terminal is  
25 expected.

00763006.002701

In any markup language, color information can be designated as the attribute of the text, the image, etc. Concretely, color at the display time can be designated to the browser by describing a color attribute in the tag information.

- 5 The browser can refer to the color attribute in the tag information in the sentence described by the markup language, and can suitably display a color of the text, the color of a background image, etc. Namely, the tag information originally describing the attribute of the text and the image, etc. in  
10 the sentence can be utilized as a judging element of efficient control of consumed power.

A concrete processing flow will be explained by using Fig. 19. The operation of an information device such as a portable information terminal, a portable phone, etc. is  
15 controlled by basic software normally called an OS (operating system). It is necessary that commands are given to the OS through an API (Application Programming Interface) and the OS gives commands of mode switching to hardware so as to switch the color light emitting display mode and the reflection  
20 display mode, the black-and-white reflection display mode or the black-and-white display mode by the browser.

In a concrete example, several cases are considered as in the following (a) to (c).

(3a) When steps 1 to 5 in Fig. 19 are performed by the browser.

- 25 (3b) When steps 1 to 5 in Fig. 19 are performed by the OS.

(3c) One portion of steps 1 to 5 in Fig. 19 is performed by the browser, and the other is partially performed by the OS.

Shield may be also formed such that only the OS can utilize the API for switching the color light emitting display mode and the reflection display mode, the black-and-white reflection display mode or the black-and-white display mode, and no user of the OS can use the API. Otherwise, it is also possible to use a construction in which the OS can manage hardware for switching the color display mode and the black-and-white display mode, but it is not necessary to prepare such hardware in the API. This construction corresponds to a case in which useless switching of hardware using software operated on the OS is prevented on an OS side. Fig. 20 shows a description example of the used markup language.

Fig. 21 shows the display screen of a device having the display unit using the invention when this device has a function which is able to select several operating modes in accordance with necessity of a user. For example, "1. clean" mode for performing the color light emitting display at any time at the using time, "2. durable (indoor)" mode for performing the black-and-white or monochromatic color display of low luminance at the using time, and "3. durable (outdoor)" mode for allocating the reflection mode at any time even at the using time can be set in the operating mode which can be selected by the user. The user selects one of lists from 1 to 3 by a

09763806-022701

key operation. Consumed power of the device can be suitably managed by providing such a function in accordance with a request of the user. In other words, power consumption of an information device can be more effectively reduced and the information device can be easily used by controlling an operation of the display unit in accordance with a using form of the information device.

A designer can arbitrarily allocate the above function to each operating mode in accordance with necessity. Further, no operating mode is limited to the embodiments in kind, number, name, etc.

A service to electronically order goods and settle accounts, etc. by the information device such as a portable phone, etc. is spread at present. Fig. 22 shows an embodiment relative to the service utilizing the portable phone, etc. using the invention. This service is formed from the relation between four persons constructed by a goods sales service provider, a connection service provider, a settlement provider and a user of the portable terminal 220 in this embodiment.

Arrows between respective two persons among the four persons show service flows in information, goods, money, etc. as an example. For example, the goods sales service provider provides a service such as goods sales of books, etc., provision of various kinds of information desired by the user, etc. One example of a providing means of the goods sales service is a

goods sales service performed by a goods sales site opened on the Internet.

For example, the connection service provider is a portable phone company, and connects an information terminal  
5 of the portable phone possessed by the user, etc. to another information terminal, and provides a connection service to the Internet, etc. The settlement service provider receives a request from the goods sales service provider, and provides a service for proxy-executing settlement of the user.

10 For example, the settlement service provider is a credit company, a bank, etc. The contract of a settlement proxy service is made in advance between the settlement service provider and the user. The settlement service provider can directly notify contents of the proxy-executed settlement to  
15 the user, or can notify these contents to the information terminal of the user through the connection service provider. Conversely, the user can connect the information terminal to the settlement service provider through the connection service provider, and can also confirm the settlement contents.

20 A service form flow will next be explained. The user connects the information terminal of the portable phone, etc. to the goods sales service provider through the connection service provider, and orders predetermined desirable goods after the user selects the predetermined desirable goods, or  
25 inputs its name, etc. The goods sales service provider sends

09763806-022701

the goods to the user in accordance with the order from the user, and also asks the settlement service provider to pay for the goods. The settlement service provider proxy-executes the settlement of the user in accordance with the request from the  
5 goods sales service provider. The settlement service provider notifies contents of the settlement to the user.

For example, in a process in which the user connects the information terminal to the goods sales service provider and orders goods and confirms the settlement, it is effective to  
10 prevent the generation of an error in order caused by an error in operation of the user that the scene of making a contract is emphasized by the color light emitting display so as to clearly recognize this scene by the user.

In a concrete embodying method, there are several methods  
15 as in the following (a) to (d).

(a) The goods sales service provider buries commands or tag information for designating the color light emitting display into a code for performing specific screen display in advance, and transmits the commands or the tag information to the  
20 information terminal through the connection service provider. The information terminal performs the color light emitting display in accordance with the above received commands or tag information.

(b) The goods sales service provider buries commands or tag  
25 information for designating the color light emitting display

09763806-022701

into a code for performing specific screen display in advance. The connection service provider transmits second commands for designating the color light emitting display to the information terminal in accordance with the above commands or tag information. The information terminal performs the color light emitting display by receiving the above second commands received from the connection service provider.

(c) The goods sales service provider transmits a specific code, and the connection service provider receiving this code sets a response to specific commands or tag information included in this code in advance. If this response is designation of the color light emitting display, the connection service provider transmits second commands for designating the color light emitting display to the information terminal. The information terminal performs the color light emitting display by receiving the above second commands from the connection service provider.

(d) A response to specific commands or tag information included in a code transmitted from the goods sales service provider through the connection service provider is set in advance in the information terminal. If this response is the color light emitting display, the color light emitting display is performed.

Fig. 23 typically shows the relation of the above (a) to (d). A white circle (○) shows a generation operation of

0753806-022701



09763806-022701

commands or tag information instructing the color light emitting display, and a black circle (●) shows a processing operation corresponding to the commands or the tag information instructing this light emitting display. The processing operation meant by the black circle ● in the connection service provider corresponds to the generating operation ○ of commands or tag information newly instructing the color light emitting display. The processing operation meant by the black circle ● in the information terminal means that the color light emitting display is performed in accordance with the received commands or tag information instructing the light emitting display.

Another means for judging the contents of an image signal will next be described with respect to timing for switching the color light emitting display and the reflection display. Here, a means for judging whether it is a color image or a black-and-white image will be explained. The following embodiments are considered as the means for judging whether it is a color image or a black-and-white image.

(a) A comparing means for comparing whether each color image signal of RGB is the same or not is arranged. If each color image signal of RGB is different, it is judged as a color image. In contrast to this, if each color image signal of RGB is the same, it is judged as a black-and-white image.

(b) A color/black-and-white control line is arranged in

addition to a transmission line of the image signal, and the color or black-and-white display is performed by referring to this control line on a display side.

(c) When the color image is transmitted, all transmission lines  
5 of each color image of RGB are used. In contrast to this, when the black-and-white image is transmitted, only a signal line of one color among the transmission lines of each color image signal of RGB is used, and a discriminating signal showing no superposition of the image signal is transmitted on signal  
10 lines of the other two colors, or these signal lines are set to be open. The color or black-and-white display is performed on the display side by referring to this transmission, etc.

When the image signal is a color image signal, the black-and-white display may be preferentially performed in  
15 consideration of low power consumption. In this case, it is necessary to convert the color image signal to a black-and-white image signal. The display unit of this embodiment and a device having this display unit have a means for converting the color image signal to the black-and-white image  
20 signal. The color light emitting display may be switched to the black-and-white reflection display by manual commands of a user, and may be also automatically switched when the battery remaining amount is equal to or smaller than a constant value, etc. The image signal of RGB is switched to the black-and-white  
25 image signal by synthesizing a luminance signal value of each

05763806-022701

color image of RGB with a weight of 299:578:114. There is no particular problem when an approximate value is used as the weight of RGB from the restrictions of a gradation bit number, a circuit scale, etc.

5 (Embodiment 7)

Fig. 24 shows a typical view of the external appearance of a portable information terminal unit having a display unit in an embodiment 7 of the invention.

09763806-022701  
10 The portable information terminal 260 of the embodiment 7 includes at least a display element 101, a main switch 261, a cursor key 262, a color light emitting/reflection display change-over switch 263, an antenna 264, etc.

Fig. 24A is a view in which the display element 101 in the portable information terminal 260 performs the reflection display. Schedule management software is used as one example of a screen displayed by this display element 101. In contrast to this, Fig. 24B is a view in which the display element 101 in the portable information terminal 260 performs the color light emitting display. The portable information terminal 260 is connected to the Internet through the antenna 264, and a state displaying information obtained from the World Wide Web site of a sightseeing spot is shown as one example of the screen displayed by the display element 101. The reflection display is preferably performed with respect to the confirmation of a schedule, etc., reference to only character information, and

information often referred so as to reduce power consumption as much as possible. In contrast to this, when the World Wide Web site including many color images is displayed, etc., it is possible to obtain display characteristically rich in entertainment by performing the color light emitting display. The portable information terminal 260 of this embodiment has the color light emitting/reflection display change-over switch 263, and is also constructed such that a user can switch the color light emitting display and the reflection display in predetermined desirable timing. As described in the embodiment 1 of the device, the portable information terminal 260 is also constructed such that the color light emitting display and the reflection display are automatically switched by control software and application of the device.

The device having the display unit of the invention is not limited to the above portable phone and the portable information terminal, but can be also applied to a device having a display for displaying certain information at any time, e.g., a home electric device. If the display device of the invention is applied to the display of the home electric device, for example, it is possible to use a method in which the reflection display low in power consumption is normally performed, and is switched to the color light emitting display, etc. at any time at a time of using the electric device or by commands of control software. Accordingly, visual recognizing property

09763806 022701

of information displayed by the device is improved, and convenience for the user can be greatly improved.

#### INDUSTRIAL APPLICABILITY

5           As explained above, in accordance with the display unit of the invention, switching of the driving method of the display element is controlled simultaneously when on/off control of the light emitting means is performed. Further, the color light emitting means is arranged between the reflecting means  
10 of external light and the light polarizing state modulating means. Accordingly, a display unit with reduced power consumption and high image quality can be provided.

09763806-022701

What is claimed is:

1. A portable information terminal comprising:  
a display section for displaying an image corresponding  
5 to a received image signal;  
a light source for supplying light to the display  
section; and  
a driving section for controlling an operation of said  
display section;  
10 wherein the portable information terminal has a color  
display mode and a monochromatic display mode as a display mode  
of the image displayed in said display section.
2. A portable information terminal according to claim  
15 1, wherein multi-gradation display is set in said color display  
mode, and two-gradation display is set in said monochromatic  
display mode.
3. A device comprising:  
20 a display section for displaying an image corresponding  
to a received image signal; and  
a light source for supplying light to the display  
section;  
said device further comprising:  
25 a display mode judging section for judging a display mode

09763806.022701  
10/22/20 9:08:39 AM

of the image displayed in said display section;

a signal generating section for generating an image signal corresponding to the display mode of said display section by instructions of the display mode judging section;

5 a light source control section for controlling an operation of said light source in accordance with the image signal from said signal generating section; and

a signal processing section for processing the image signal in accordance with the image signal from said signal  
10 generating section.

4. A device comprising:

a display section for displaying an image corresponding to a received image signal; and

15 a light source for supplying light to the display section;

said device further comprising:

a display mode judging section for judging a display mode of the image displayed in said display section;

20 a signal generating section for generating a control signal and an image signal corresponding to the display mode of said display section in accordance with instructions of the display mode judging section;

a signal processing switching section for switching a  
25 signal processing path in accordance with the control signal

09753806-022701

from the signal generating section;

a signal processing section for processing the image signal in accordance with the switching of the signal processing path of said signal switching section; and

5 a light source control section for controlling an operation of said light source in accordance with instructions from said signal switching section.

5. A device comprising:

10 a display section for displaying an image corresponding to a received image signal; and

a light source for supplying light to the display section;

said device further comprising:

15 a display mode judging section for judging a display mode of the image displayed in said display section;

a signal generating section for generating an image signal corresponding to the display mode of said display section by instructions of said display mode judging section;

20 a signal processing switching section for switching a signal processing path by instructions from said display mode judging section;

a signal processing section for processing the image signal in accordance with the switching of the signal processing path of said signal switching section; and

25

00763806 \* 022701



a light source control section for controlling an operation of said light source in accordance with instructions from said signal switching section.

5           6. A device according to claim 4, wherein the device further comprises a frequency control section for switching the control of an operating frequency of said signal processing section in accordance with said control signal from said signal generating section.

10

7. A device according to claim 3, wherein said signal processing section has an n-bit memory, a digital-analog converter connected to the n-bit memory, a 1-bit memory, and a level shifter connected to the 1-bit memory; and

15

the display mode displayed by said display section has a multi-gradation display mode and a two-gradation display mode;

20

in the case of the multi-gradation display mode, said signal processing switching section selects said n-bit memory in said signal processing section, and said signal processing section processes the image signal generated by said signal generating section, by said n-bit memory and said digital-analog converter connected to the n-bit memory (n is a natural number equal to or greater than 2); and

25

in the case of the two-gradation display mode, said

09763806-022701  
10/22/20 9:08:29 AM

signal processing switching section processes the image signal generated by said signal processing section by said 1-bit memory and said level shifter.

5           8. A device according to claim 3, wherein said device has an n-bit memory (n is an integer equal to or greater than 2) connected to said signal processing switching section; and the display mode displayed by said display section has a multi-gradation display mode and a two-gradation display  
10 mode;

when said display mode judging section judges the multi-gradation display mode, said signal processing switching section selects said digital-analog converter, and processes the image signal held in said n-bit memory connected  
15 to said signal processing section by said digital-analog converter; and

when said display mode judging section judges the two-gradation display mode, said signal processing switching section selects said level shifter, and processes the image  
20 signal held in said n-bit memory connected to said signal processing section by said level shifter.

9. A device comprising:

a display section for displaying an image corresponding  
25 to a received image signal; and

00763806-02701

a light source for supplying light to the display section;

said device further comprising:

a display mode judging section for judging a display mode  
5 of the image displayed in said display section;

a signal generating section for generating an image signal and a control signal corresponding to instructions of said display mode judging section;

a signal processing switching section for switching a  
10 signal processing path in accordance with the control signal from the signal generating section;

a signal processing section for processing the image signal in accordance with the switching of the signal processing path of said signal switching section; and

15 a light source control section for controlling an operation of said light source in accordance with instructions from said signal switching section.

10. A device comprising:

20 a display section for displaying an image corresponding to a received image signal; and

a light source for supplying light to the display section;

said device further comprising:

25 a signal generating section for generating an image

signal corresponding to the image displayed in said display section;

a display mode judging section for judging a display mode of the image displayed in said display section;

5 a signal processing switching section for switching a signal processing path by instructions from said display mode judging section;

10 a signal processing section for processing the image signal in accordance with the switching of the signal processing path of said signal switching section; and

a light source control section for controlling an operation of said light source in accordance with instructions from said signal switching section.

15 11. A device according to claim 10, wherein the display mode of said display section in said device has multi-gradation display and two-gradation display;

said signal processing switching section has an n-bit memory (n is a natural number equal to or greater than 2) connected to the signal switching section;

said signal processing section has a digital-analog converter, a level shifter and a bit converting section connected to the level shifter;

25 when said display mode judging section judges the multi-gradation display mode, said signal processing

switching section selects said digital-analog converter in said signal processing section;

said signal processing section processes the image signal generated by said signal generating section by said  
5 digital-analog converter;

when said display mode judging section judges the two-gradation display mode, said signal processing switching section selects said bit converting section in said signal processing section; and

10 said signal processing section processes the image signal generated by said signal generating section by said bit converting section and said level shifter.

12. A device according to claim 10, wherein the display  
15 mode of said display section in said device has color display and monochromatic display;

said signal processing switching section has an n-bit memory (n is a natural number equal to or greater than 2) connected to the signal switching section;

20 said signal processing section has a digital-analog converter, a level shifter and an image converting section connected to the level shifter;

said signal processing switching section selects said digital-analog converter in said signal processing section in  
25 the case of the color display;

09763806.022701

said signal processing section processes the image signal generated by said signal generating section by the digital-analog converter;

5       said signal processing switching section selects said image converting section in said signal processing section in the case of the monochromatic display; and

      said signal processing section processes the image signal generated by said signal generating section by said image converting section and the level shifter.

10

13. A device according to claim 10, wherein said display mode in said device has color multi-gradation display and monochromatic binary display, and

      said bit converting section in said signal processing  
15   section also converts the image signal from the color display to the monochromatic display.

14. A device according to claim 9 or 10, wherein the device further comprises a frequency control section for  
20   controlling a clock frequency in accordance with instructions of said signal processing switching section.

15. A device according to 3, wherein switching timing of the display mode switched by said display mode judging  
25   section is set by the operation of a user.

09763806-022701

16. A device according to claim 3, wherein switching timing of the display mode switched by said display mode judging section is tag information in information described in a markup language.

17. A display unit having a light source, comprising:  
a signal processing switching section for switching a processing path of an inputted image signal;

a signal processing section for processing said image signal in accordance with the switching of the processing path in said signal processing switching section;

a display section for displaying an image in accordance with the image signal from the image signal processing section;

and

a light source control section for controlling an operation of said light source in accordance with a signal from the signal processing switching section.

18. A display unit according to claim 17, wherein said display section is a liquid crystal cell, and

the display unit is constructed by

a display element having the liquid crystal cell and said light source, and

a driving section having said light source control

section, said signal processing switching section and said signal processing section.

19. A display unit according to claim 18, wherein said  
5 display element has:

the liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in at least one of said pair of transparent substrates;

10 a reflection plate arranged on one face side of said liquid crystal cell; and

a light guide body arranged between said liquid crystal cell and said reflection plate such that said light source is arranged on a side face of the light guide body.

15 20. A display unit according to claim 18, wherein said display element has:

the liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in at least one of said pair of transparent substrates;

a light polarizing maintaining diffusion reflection plate arranged on one face side of said liquid crystal cell;

25 a light guide body arranged between said liquid crystal cell and said light polarizing maintaining diffusion

09763806.022701



reflection plate such that said light source is arranged on a side face of the light guide body; and

a light polarizing maintaining scattering layer arranged between said light guide body and said liquid crystal cell.

5

21. A display unit according to claim 18, wherein the display mode in said display section has multi-gradation display and two-gradation display;

10 said signal processing section of said driving section has a digital-analog converter and a level shifter;

said signal processing switching section processes the image signal by selecting said digital-analog converter in said signal processing section when the display mode of said display section shows the multi-gradation display; and

15 said signal processing switching section processes the image signal by selecting said level shifter when the display mode of said display section shows the two-gradation display.

22. A display unit according to claim 18, wherein said 20 signal processing section in said driving section has:

a first signal processing circuit section having a digital-analog converter; and

a second signal processing circuit section having a level shifter;

25 said signal processing switching section switches one

09763806.022701

of said first and second signal processing circuit sections in accordance with an inputted control signal; and

only said switched first or second signal processing circuit section converts the inputted digital image signal to  
5 an analog image signal.

23. A display unit according to claim 21, wherein said signal processing switching section in said driving section has an n-bit memory (n is a natural number equal to or greater  
10 than 2) connected to the signal processing switching section.

24. A display unit according to claim 18, wherein said image signal generating section in said driving circuit section has:

15 a first signal processing circuit having an n-bit memory (n is a natural number equal to or greater than 2) and a digital-analog converter connected to the n-bit memory;

a 1-bit memory; and a level shifter connected to the 1-bit memory;

20 said mode switching section selects one of said first and second signal processing circuit sections in accordance with an inputted control signal;

said image signal generating section holds a digital image signal in the n-bit memory, and then converts the digital  
25 image signal to an analog image signal by said digital-analog

09763806-022701

converter when said first signal processing circuit section is selected; and

said image signal generating section holds the inputted digital image signal in the 1-bit memory, and then converts  
5 the digital image signal to an analog image signal by said level shifter when said second signal processing circuit section is selected.

25. A display unit according to claim 18, wherein said  
10 driving section has a frequency control section for controlling a clock frequency in accordance with instructions of said mode switching section.

26. A display unit according to claim 25, wherein the  
15 display mode of the display section in said display unit has color display and monochromatic display,

said frequency control section in said display unit performs control for setting the clock frequency in the color display in said display mode to be lower than that in the  
20 monochromatic display in said display mode.

27. A display unit having a light source, comprising:  
a mode switching section for switching a displayed image mode and controlling an operation of said light source;  
25 an image signal processing section for processing an

09763806.022701

image signal in accordance with instructions from the mode switching section; and

a display cell for displaying the image in accordance with the image signal from the image signal processing section.

5

28. A display unit according to claim 27, wherein the display unit is constructed by

a display element having said liquid crystal cell and said light source, and

10

a driving section having said mode switching section and said image signal processing section.

29. A display unit according to claim 28, wherein said display element has:

15

the liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in said pair of transparent substrates;

a reflection plate arranged on one face side of said liquid crystal cell; and

20

a light guide body arranged between said liquid crystal cell and said reflection plate such that said light source is arranged on a side face of the light guide body.

25

30. A display unit according to claim 28, wherein said

09763806.022701

display element has:

the liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in said  
5 pair of transparent substrates;

a light polarizing maintaining diffusion reflection plate arranged on one face side of said liquid crystal cell;

a light guide body arranged between said liquid crystal cell and said light polarizing maintaining diffusion  
10 reflection plate such that said light source is arranged on a side face of the light guide body; and

a light polarizing maintaining type scattering layer arranged between said light guide body and said liquid crystal cell.

15

31. A display unit according to claim 28, wherein said image signal processing section of said driving section has a digital-analog converter and a level shifter;

said image signal generating section generates the image  
20 signal of analog multi-gradation by using said digital-analog converter when said mode switching section switches the display mode to a multi-gradation display mode; and

said image signal generating section generates the image signal of analog binary gradation by using the level shifter  
25 when said mode switching section switches the display mode to

09763806-022701

a two-gradation display mode.

32. A display unit according to claim 28, wherein said image signal generating section in said driving circuit section

5 has:

a first signal processing circuit section having a digital-analog converter; and

a second signal processing circuit section having a level shifter;

10 said mode switching section selects one of said first and second signal processing circuit sections; and

said selected first or second signal processing circuit section converts an inputted digital image signal to an analog image signal.

15

33. A portable terminal comprising:

a liquid crystal cell for displaying an image;

a light source for making light incident to said liquid crystal cell;

20 a mode switching section for switching a display mode of the image displayed in said liquid crystal cell;

a light source control section controlled by said mode switching section, and controlling an operation of said light source; and

25 an image generating section for generating an image

0763806.02701  
10/22/00 09:08:20

signal corresponding to said display mode.

34. A display element comprising:

5 a liquid crystal cell having a pair of transparent substrates, a liquid crystal layer nipped between the pair of transparent substrates, and an electrode group arranged in said pair of transparent substrates;

a light polarizing maintaining diffusion reflection plate arranged on one face side of said liquid crystal cell;

10 a light guide body arranged between said liquid crystal cell and said light polarizing maintaining diffusion reflection plate such that a light source is arranged on a side face of the light guide body; and

15 a light polarizing maintaining type scattering layer arranged between said light guide body and said liquid crystal cell.

35. A display unit comprising:

a light source;

20 a liquid crystal cell having said light source therein; a mode switching section for switching a display mode of an image displayed in at least said crystal cell, and controlling an operation of said light source; and

25 an image signal generating section for generating an image signal corresponding to said display mode.

36. A display unit according to claim 35, wherein the display unit has a display element and a driving circuit section, and

5        said display element has said liquid crystal cell, and  
      said driving circuit section has said mode switching section and said image signal generating section.

37. A display unit according to claim 36, wherein said  
10 display element includes a liquid crystal cell having:

      a pair of substrates;

      a liquid crystal layer nipped by said pair of substrates;

      plural pixels formed by an electrode kind arranged in

15        at least one of said pair of substrates; and

      said light source arranged in accordance with each of  
      said plural pixels and constructed by including a metallic  
      electrode, an organic LED layer and a transparent electrode  
      from a substrate side.

20        38. A display unit according to claim 37, wherein said  
      mode switching section in said driving circuit section switches  
      one of the control of an operation of said liquid crystal layer  
      in said liquid crystal cell and the control of an operation  
      of said organic LED.



39. A display unit according to claim 38, wherein said image signal generating section in said driving circuit section has a digital-analog converter and a level shifter;

5 said mode switching section selects the control of the operation of said liquid crystal layer in said liquid crystal cell;

10 said image signal generating section generates the image signal of analog multi-gradation by using said digital-analog converter when said mode switching section switches the display mode to a multi-gradation display mode; and

15 said image signal generating section generates the image signal of analog binary gradation by using the level shifter when said mode switching section switches the display mode to a two-gradation display mode.

20 40. A portable information terminal having a display unit, an antenna, a wireless section connected to the antenna, and an entire device control section connected to the wireless section and said display unit and controlling the operation of an entire device;

wherein said display unit is the display unit described in claim 17 or 27; and

25 said entire device control section generates a digital image signal corresponding to a display mode of said display element in said display unit.

03763806.022701

41. A portable information terminal according to claim 40, wherein the portable information terminal has the display unit, the antenna, the wireless section connected to the antenna, and the entire device control section connected to the wireless section and said display unit and controlling the operation of the entire device; and

said display unit is the display unit described in claim 17 or 27.

09763806.022701

## ABSTRACT OF THE DISCLOSURE

The invention provides a display unit in which brightness equal to that in a conventional black-and-white reflection type is obtained and power consumption is small at a standby time, and bright color display of high quality can be performed and power consumption is small at a using time, and also provides an information device having this display unit such as a portable phone, etc.

The display unit has a color light emitting means, a reflecting means of external light and a light polarizing state modulating means, and is characterized in that the display unit has a driving method switching means for switching color light emitting display and reflection display by on/off control of the light emitting means and switching control of a driving method of a display element.

09763806.022701

1/17

FIG. 1

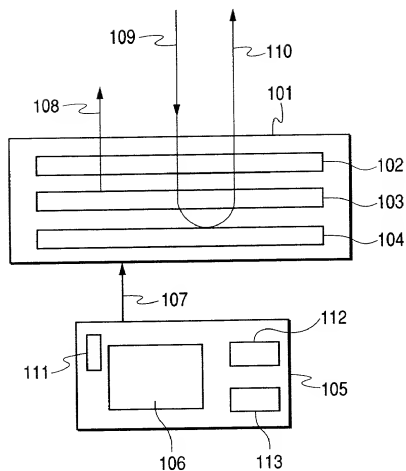
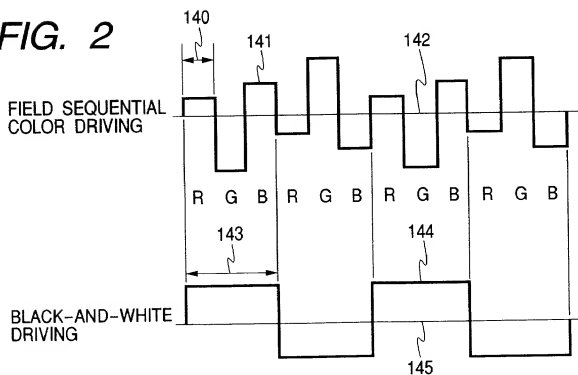


FIG. 2



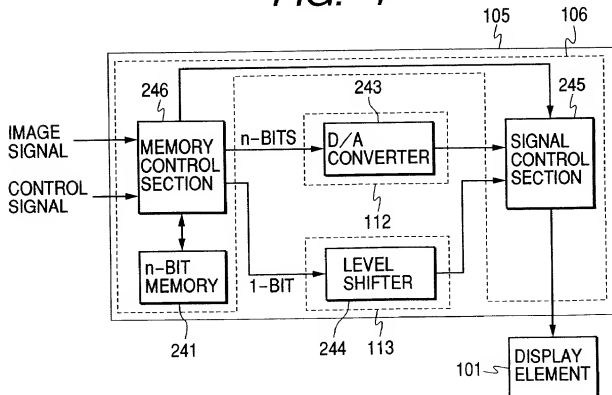


FIG. 5

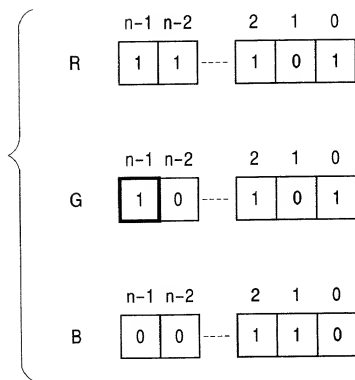


FIG. 6(a)

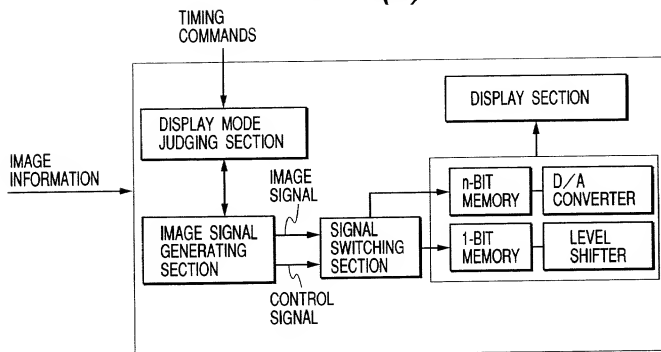


FIG. 6(b)

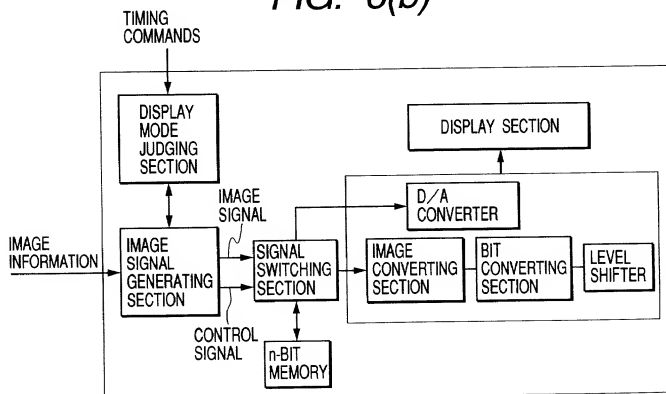


FIG. 7(a)

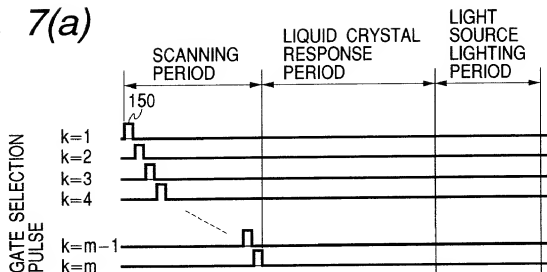


FIG. 7(b)

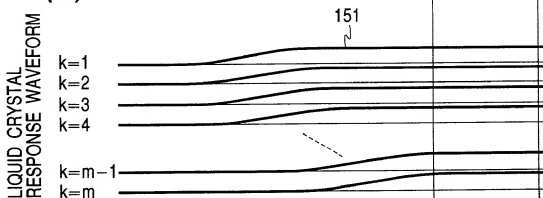


FIG. 7(c)






FIG. 8(a)





FIG. 8(b)





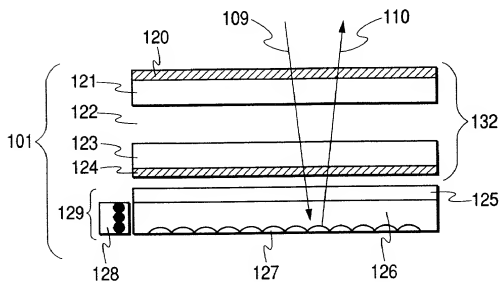


FIG. 10

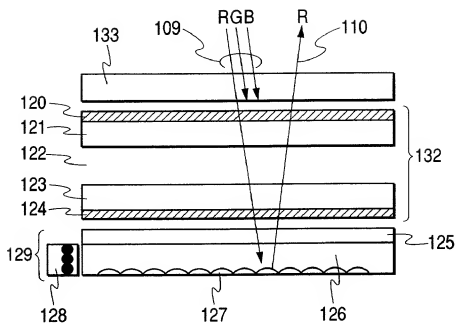

9/17

FIG. 11(a)




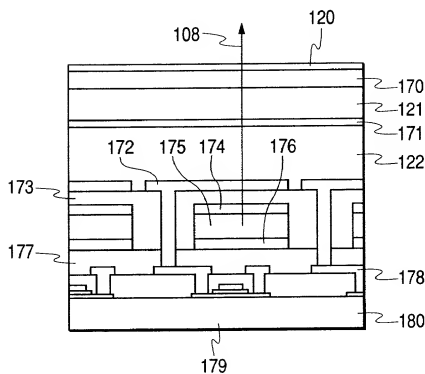


FIG. 11(b)

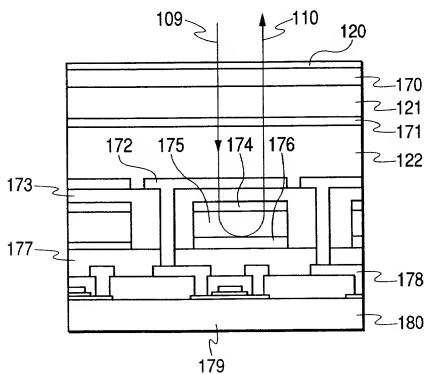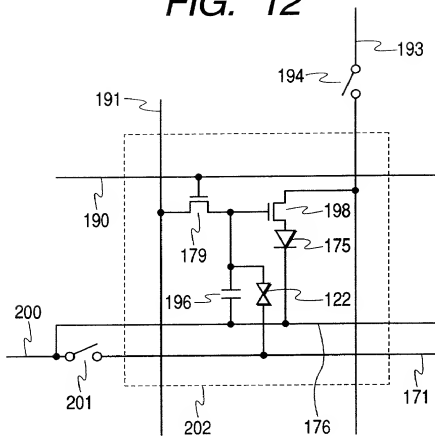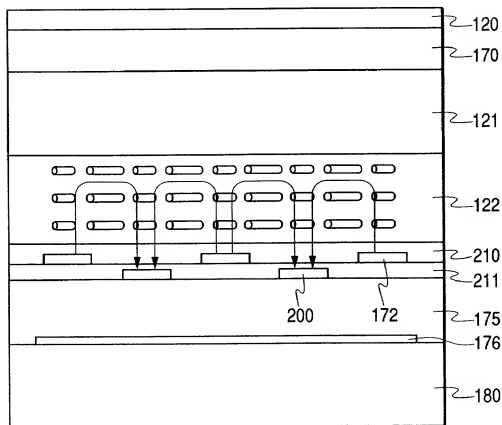

10/17

**FIG. 12****FIG. 13**

11 / 17

FIG. 14

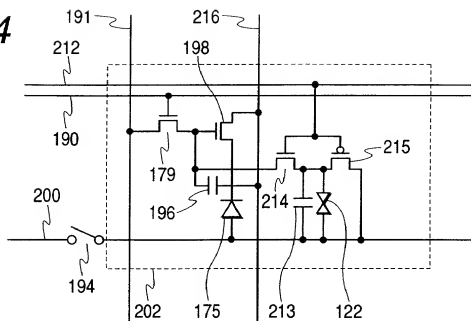


FIG. 15

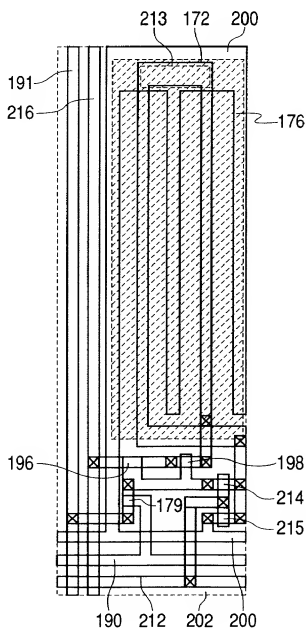


FIG. 16

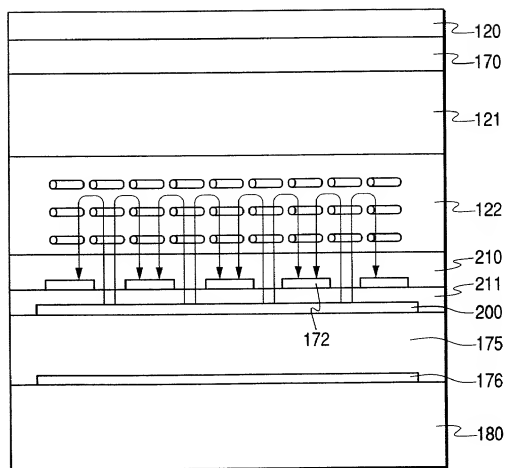


FIG. 17(a)

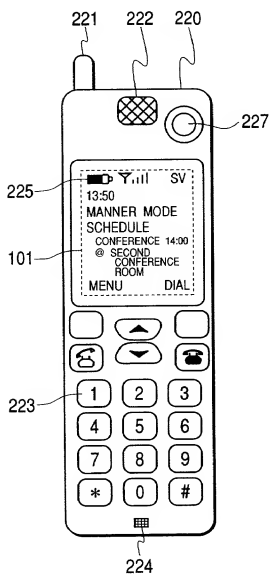


FIG. 17(b)

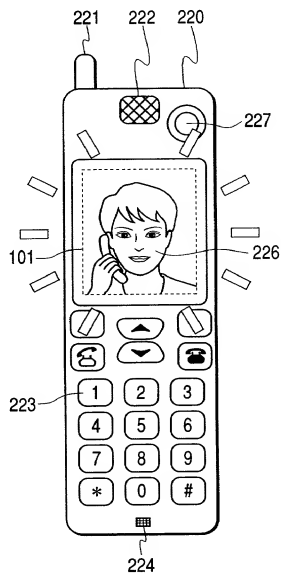




FIG. 18

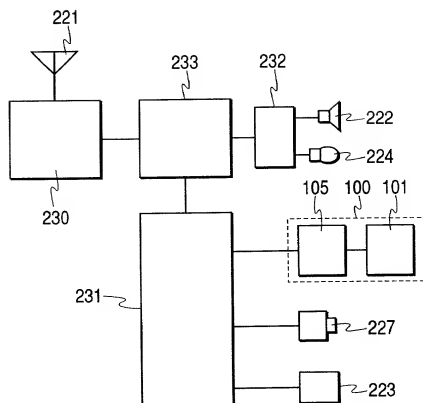
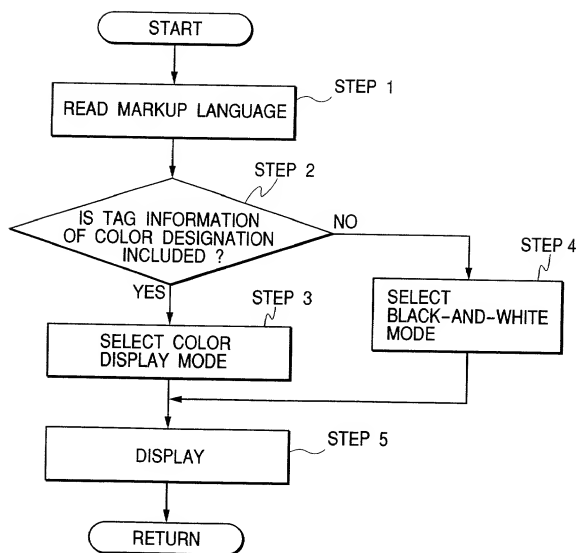


FIG. 19



**FIG. 20**

```

{
  <HTML><HEAD><TITLE>BODY</TITLE> </HEAD> <BODY>
  <BODY bgcolor="#FFFF80" text="#FF0000" link="#0000FF" >
  THE PRESENT TEXT ON SCREEN IS DISPLAYED IN RED
  FONT A WITH LIGHT YELLOW BACKGROUND.
  LINK IS DISPLAYED IN BLUE FONT.
  </BODY>
  </HTML>
}

```

**FIG. 21**

MODE SELECTION:	
1. CLEAN	
2. DURABLE (INDOOR)	
3. DURABLE (OUTDOOR)	
RETURN	OK

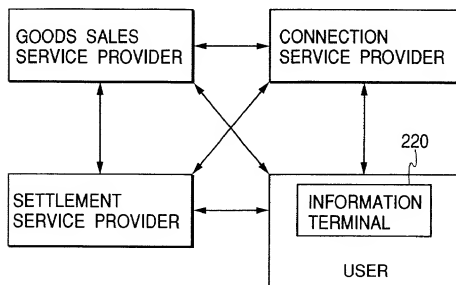
**FIG. 22**

FIG. 23


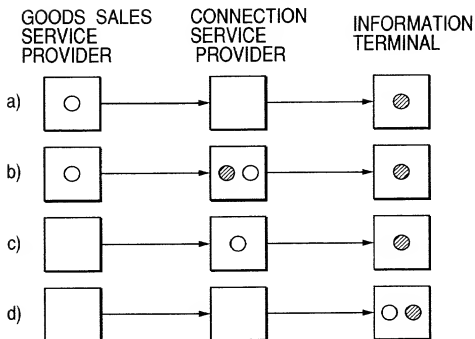


FIG. 24

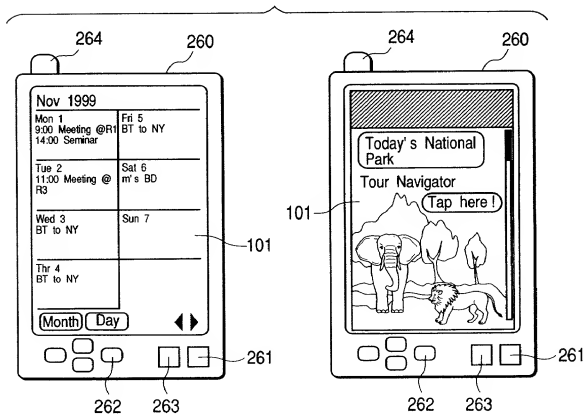

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COLOR/BLACK-AND-WHITE SWITCHABLE PORTABLE

TERMINAL AND DISPLAY UNIT

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。☒ was filed on May 24, 2000  
as United States Application Number or  
PCT International Application Number  
PCT/JP00/03912, and was amended on \_\_\_\_\_  
(if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

# Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

## Prior Foreign Application(s)

外国での先行出願

(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

(Day/Month/Year Filed) (出願年月日)
(Day/Month/Year Filed) (出願年月日)

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、私自身の知識に基づいて本宣言書中で私が行う表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基づき、罰金または拘禁、もしくはその両方より処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)
---

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)
---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

# Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

## 書類送付先

Send Correspondence to:

Antonelli, Terry, Stout & Kraus, LLP  
Suite 1800  
1300 North Seventeenth Street  
Arlington, Virginia 22209

## 直接電話連絡先：(氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (703) 312-6600  
Fax: (703) 312-6666

唯一または第一発明者	Full name of sole or first inventor <u>Shouchi HIROTA</u>	
発明者の署名	日付	Inventor's signature Date <u>Shouchi Hirota</u> <u>02/07/2001</u>
住所	Residence <u>Hitachi-shi, Japan</u>	
国籍	Citizenship <u>Japan</u>	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第二共同発明者	Full name of second joint inventor, if any Makoto TSUMURA
第二共同発明者の署名 日付	Second inventor's signature Date Makoto Tsumura 02/08/2001
住所	Residence Hitachi-shi, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第三共同発明者	Full name of third joint inventor, if any Ikuo HIYAMA
第三共同発明者の署名 日付	Third inventor's signature Date Ikuo HiYama 02/07/2001
住所	Residence Hitachi-shi, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第四共同発明者	Full name of fourth joint inventor, if any Takayuki OOUCHI
第四共同発明者の署名 日付	Fourth inventor's signature Date Takayuki Oouchi 02/07/2001
住所	Residence Hitachi-shi, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第五共同発明者	Full name of fifth joint inventor, if any
第五共同発明者の署名 日付	Fifth inventor's signature Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

(第六以降の共同発明者についても同様に記載し、署名を  
すること) (Supply similar information and signature for sixth and subsequent  
joint inventors.)